



CT Micro

4N2X, 4N3X, H11AX 6Pin Photo Transistor Coupler

Features

- High isolation 5000 VRMS
- CTR flexibility available see order information
- DC input with transistor output
- Temperature range - 55 °C to 110 °C


Applications

- Switch mode power supplies
- Computer peripheral interface
- Microprocessor system interface

Description


The 4N2X, 4N3X and H11AX series consists of a phototransistor optically coupled to a gallium arsenide Infrared-emitting diode in a 6-lead DIP package with bending options.

Package Outline

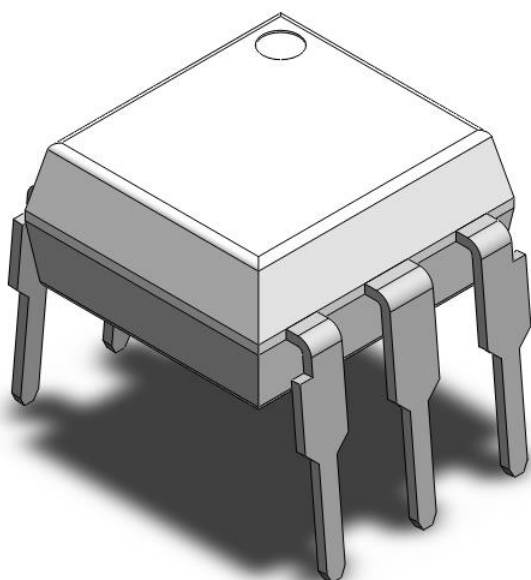

Note: Different bending options available. See package dimension.

Schematic

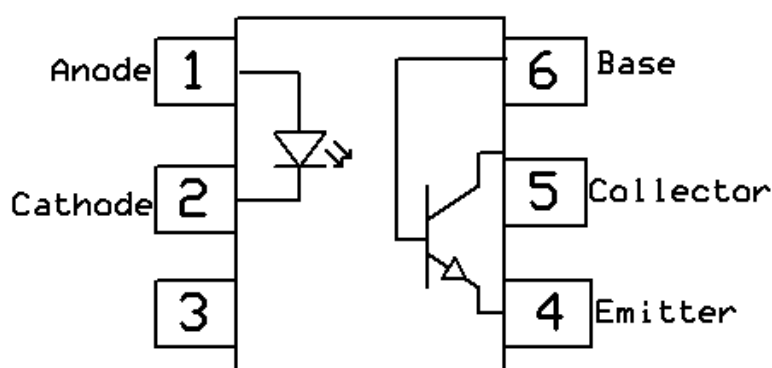



CT Micro

4N2X, 4N3X, H11AX 6Pin Photo Transistor Coupler

Absolute Maximum Rating at 25°C

Symbol	Parameters	Ratings	Units	Notes
V _{ISO}	Isolation voltage	5000	V _{RMS}	
T _{OPR}	Operating temperature	-55 ~ +110	°C	
T _{STG}	Storage temperature	-55 ~ +125	°C	
T _{SOL}	Soldering temperature	260	°C	
Emitter				
I _F	Forward current	60	mA	
I _{F(TRANS)}	Peak transient current (≤1μs P.W,300pps)	1	A	
V _R	Reverse voltage	6	V	
P _D	Power dissipation	100	mW	
Detector				
P _D	Power dissipation	150	mW	
B _{VCEO}	Collector-Emitter Breakdown Voltage	80	V	
B _{VCBO}	Collector-Base Breakdown Voltage	80	V	
B _{VECO}	Emitter-Collector Breakdown Voltage	7	V	
B _{VEBO}	Emitter-Base Breakdown Voltage	7	V	



CT Micro

4N2X, 4N3X, H11AX

6Pin Photo Transistor Coupler

Electrical Characteristics $T_A = 25^\circ\text{C}$ (unless otherwise specified)

Emitter Characteristics

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
V_F	Forward voltage	$I_F = 10\text{mA}$		1.2	1.4	V	
I_R	Reverse Current	$V_R = 6\text{V}$	-	-	5	μA	
C_{IN}	Input Capacitance	$f = 1\text{kHz}$	-	45	-	pF	

Detector Characteristics

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
$B_{V_{CEO}}$	Collector-Emitter Breakdown	$I_C = 100\mu\text{A}$	80	-	-	V	
$B_{V_{ECO}}$	Emitter-Collector Breakdown	$I_E = 1\text{mA}$	7	-	-	V	
$B_{V_{CBO}}$	Collector-Base Breakdown	$I_C = 100\mu\text{A}$	80	-	-	V	
$B_{V_{EBO}}$	Emitter-Base Breakdown	$I_E = 100\mu\text{A}$	7	-	-	V	
I_{CEO}	Collector-Emitter Dark Current	4N2X, H11AX $V_{CE} = 10\text{V}, I_F = 0\text{mA}$	-	-	45	nA	
		4N3X $V_{CE} = 60\text{V}, I_F = 0\text{mA}$	-	-	45	nA	
I_{CBO}	Collector-Base Dark Current	$V_{CB} = 10\text{V}, I_F = 0\text{mA}$	-	-	20	nA	

Transfer Characteristics

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
CTR	Current Transfer Ratio	4N35, 4N36, 4N37	100	-	-	%	
		4N25, 4N26, 4N38, H11A2, H11A3	20	-	-		
		4N27, 4N28, H11A4	10	-	-		
		H11A1	50	-	-		
		H11A5	30	-	-		
$V_{CE(SAT)}$	Collector-Emitter Saturation Voltage	4N2X $I_F = 50\text{mA}, I_C = 2\text{mA}$	-	-	0.5	V	
		4N35, 4N36, 4N37 $I_F = 10\text{mA}, I_C = 0.5\text{mA}$	-	-	0.3		
		H11AX $I_F = 10\text{mA}, I_C = 0.5\text{mA}$	-	-	0.4		
		4N38 $I_F = 20\text{mA}, I_C = 4\text{mA}$	-	-	1.0		
R_{IO}	Isolation Resistance	$V_{IO} = 500\text{V}_{DC}$	1×10^{11}			Ω	
C_{IO}	Isolation Capacitance	$f = 1\text{MHz}$		0.25		pF	



CT Micro

4N2X, 4N3X, H11AX 6Pin Photo Transistor Coupler

Switching Characteristics

Symbol	Parameters		Test Conditions	Min	Typ	Max	Units	Notes
T _{ON}	Turn On Time	4N2X, H11AX	I _F = 10mA, V _{CE} = 10V, R _L = 100Ω	-	2.6	9.8	μs	
		4N3X	I _C = 2mA, V _{CE} = 10V, R _L = 100Ω	-	9.5	11.5		
T _{OFF}	Turn Off Time	4N2X, H11AX	I _F = 10mA, V _{CE} = 10V, R _L = 100Ω	-	2.6	9.8	μs	
		4N3X	I _C = 2mA, V _{CE} = 10V, R _L = 100Ω	-	9.5	11.5		



CT Micro

4N2X, 4N3X, H11AX

6Pin Photo Transistor Coupler

Typical Characteristic Curves

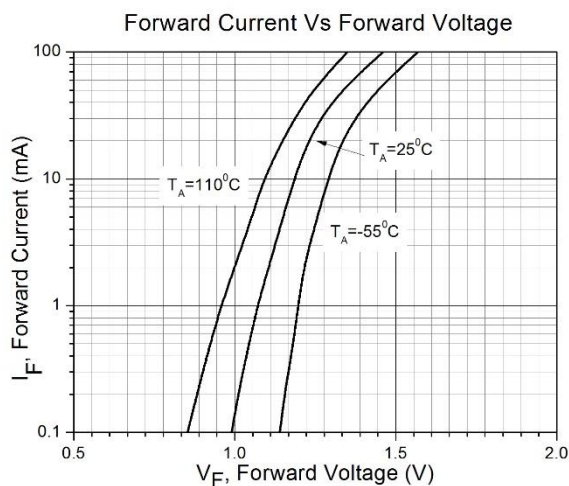


Figure 1

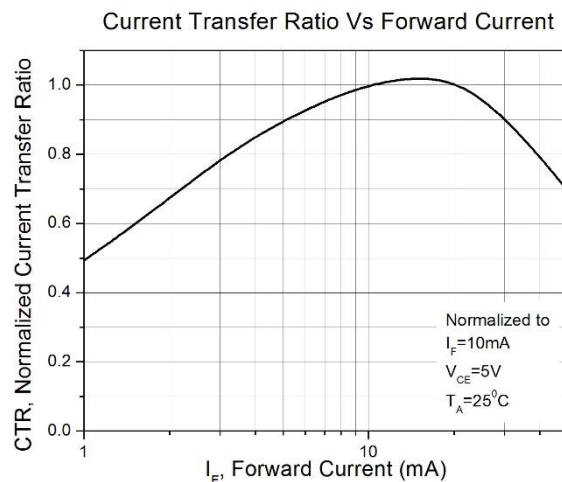


Figure 2

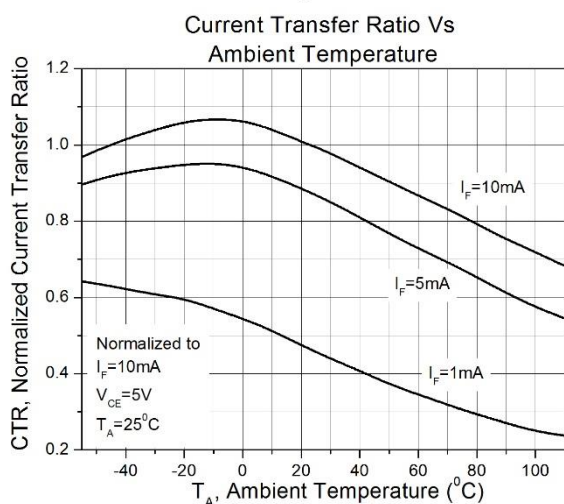


Figure 3

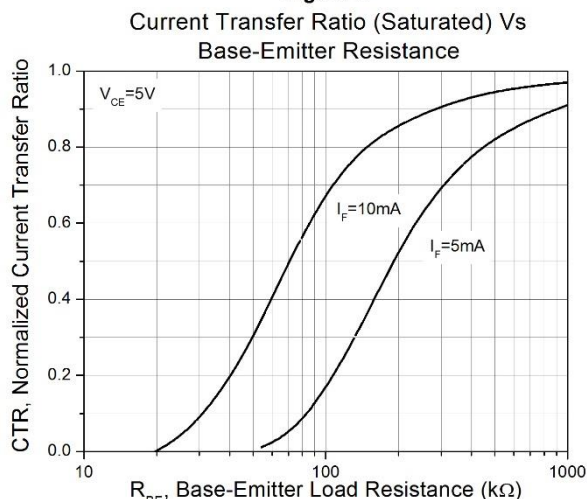


Figure 4

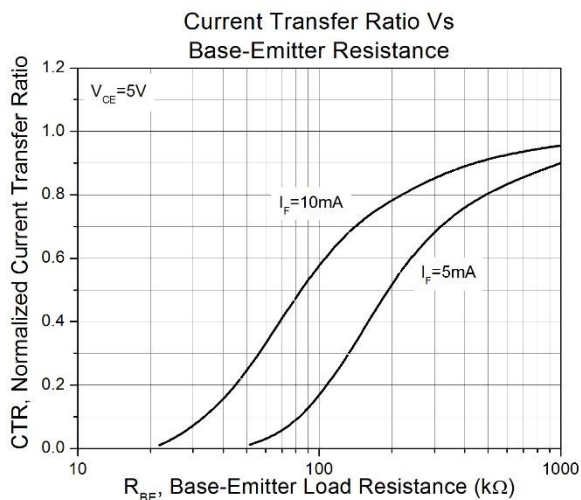


Figure 5

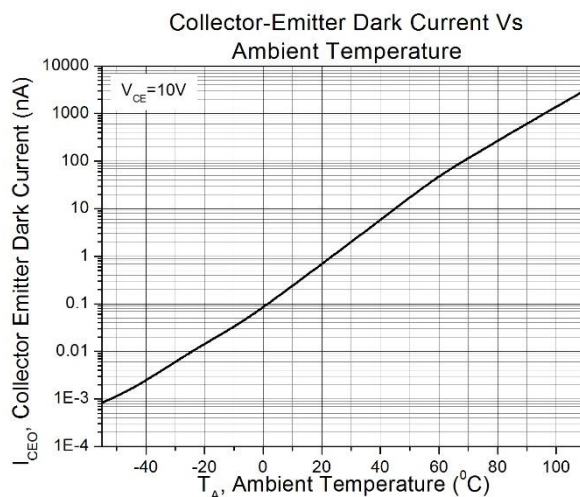


Figure 6



CT Micro

4N2X, 4N3X, H11AX 6Pin Photo Transistor Coupler

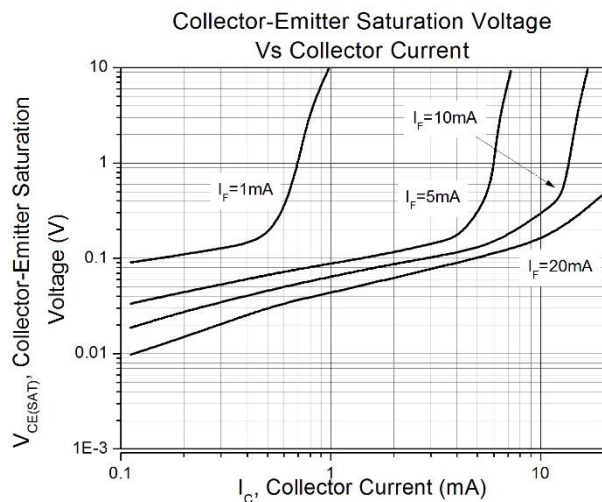


Figure 7

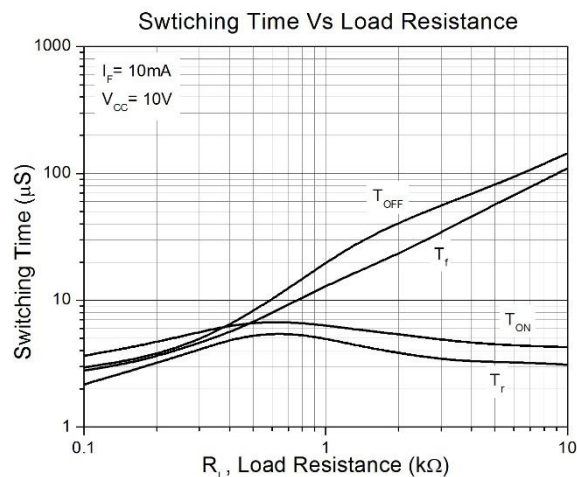


Figure 8

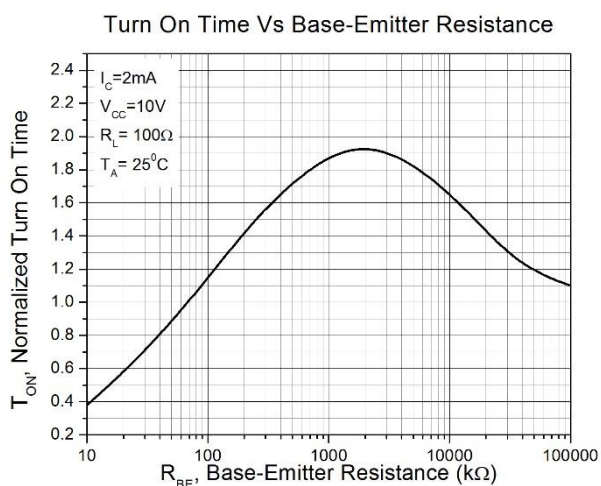


Figure 9

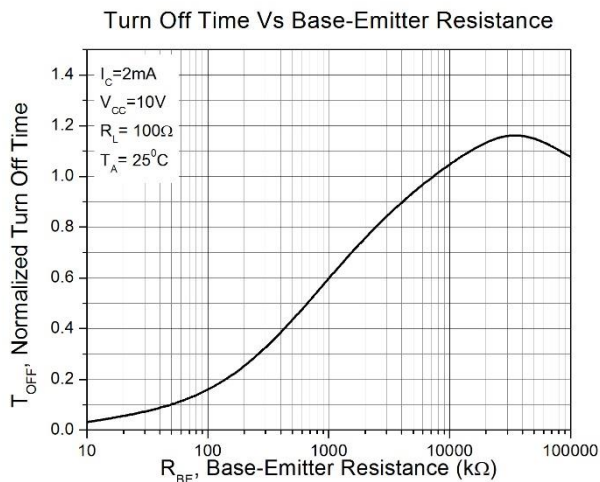


Figure 10




CT Micro


4N2X, 4N3X, H11AX 6Pin Photo Transistor Coupler

Package Dimension *Dimensions in mm unless otherwise stated*

Standard DIP – Through Hole

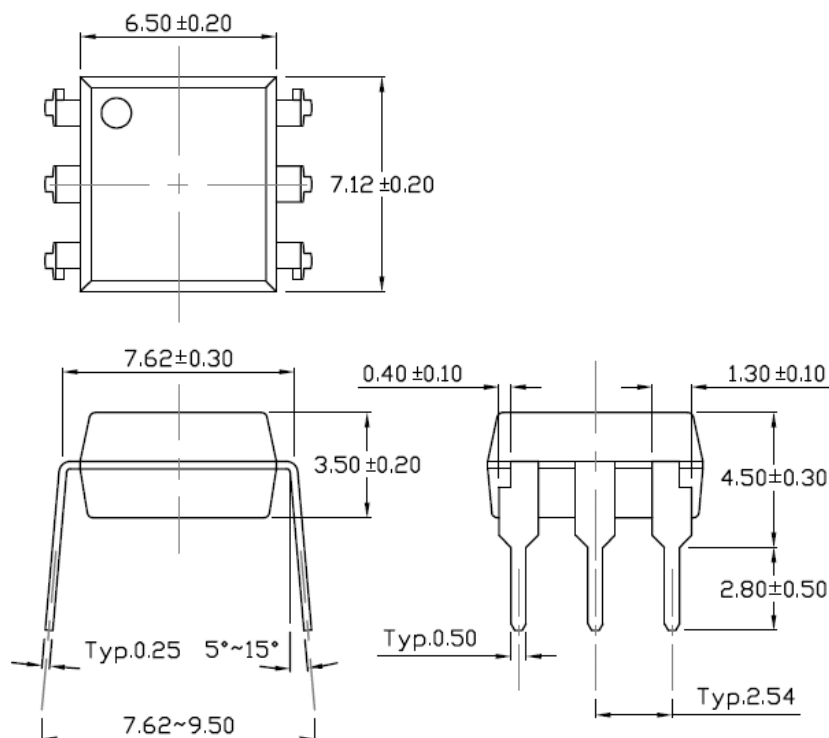

Wide Lead Forming – Through Hole

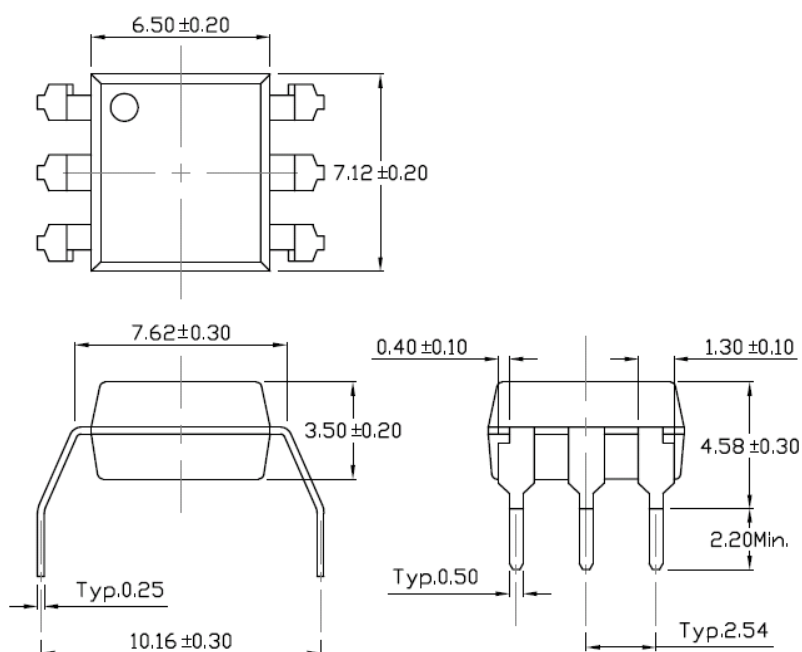





CT Micro

4N2X, 4N3X, H11AX 6Pin Photo Transistor Coupler

Surface Mount Forming

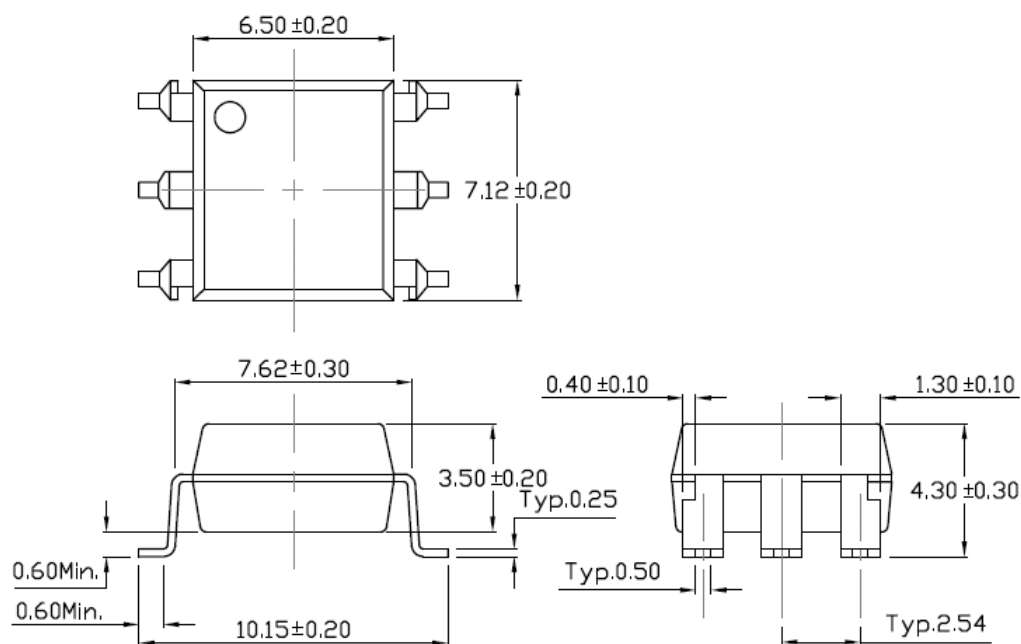

Surface Mount Forming (Low Profile)

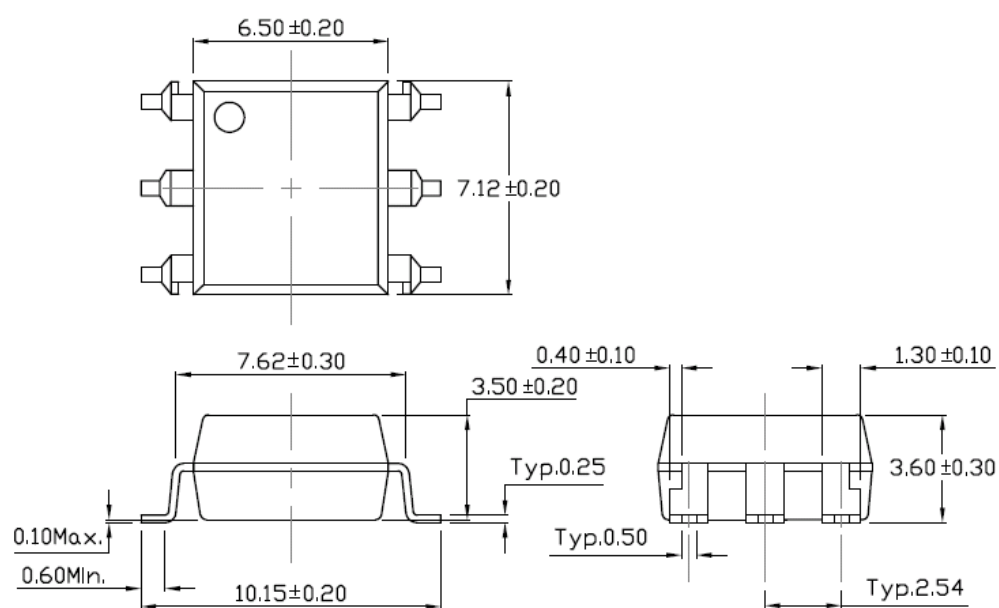





CT Micro

4N2X, 4N3X, H11AX 6Pin Photo Transistor Coupler

Recommended Solder Mask *Dimensions in mm unless otherwise stated*

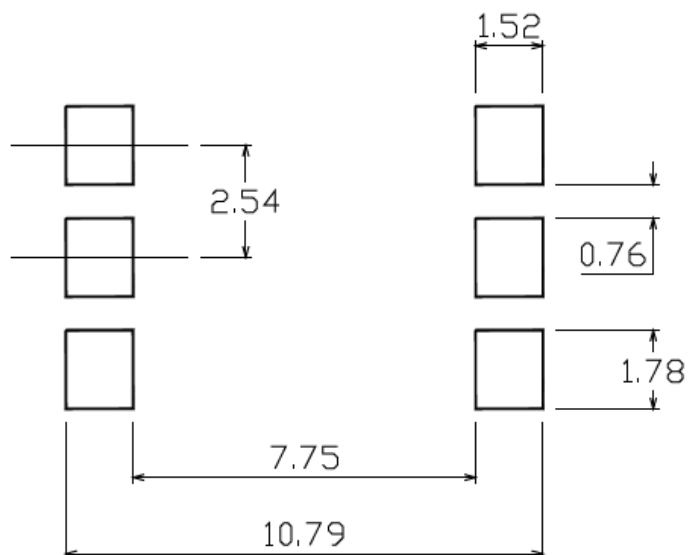

Marking Information

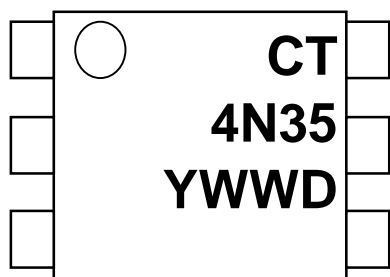

Note:

CT : Logo
4N35 : Product Number
Y : Fiscal Year
WW : Work Week
D : Production Code



CT Micro

4N2X, 4N3X, H11AX 6Pin Photo Transistor Coupler

Ordering Information

4N2X(Y)(Z)-G, 4N3XY(Z)-G, H11AXY(Z)-G

X = (5,6,7,8 for 4N2X & 4N3X series), (1,2,3,4,5 for H11AX series)

Y = Lead form option (S, SL, M or none)

Z = Tape and reel option (TA, TB or none)

G= Material option (G: Green, None: Non-green)


Option	Description	Quantity
None	Standard 6 Pin Dip	50Units/Tube
M	Wide Lead Forming	50Units/Tube
S(TA)	Surface Mount Lead Forming – With Option A Taping	1000 Units/Reel
S(TB)	Surface Mount Lead Forming – With Option B Taping	1000 Units/Reel
SL(TA)	Surface Mount Lead Forming(Low Profile) – With Option A Taping	1000 Units/Reel
SL(TB)	Surface Mount Lead Forming(Low Profile) – With Option B Taping	1000 Units/Reel



CT Micro

4N2X, 4N3X, H11AX 6Pin Photo Transistor Coupler

Reflow Profile

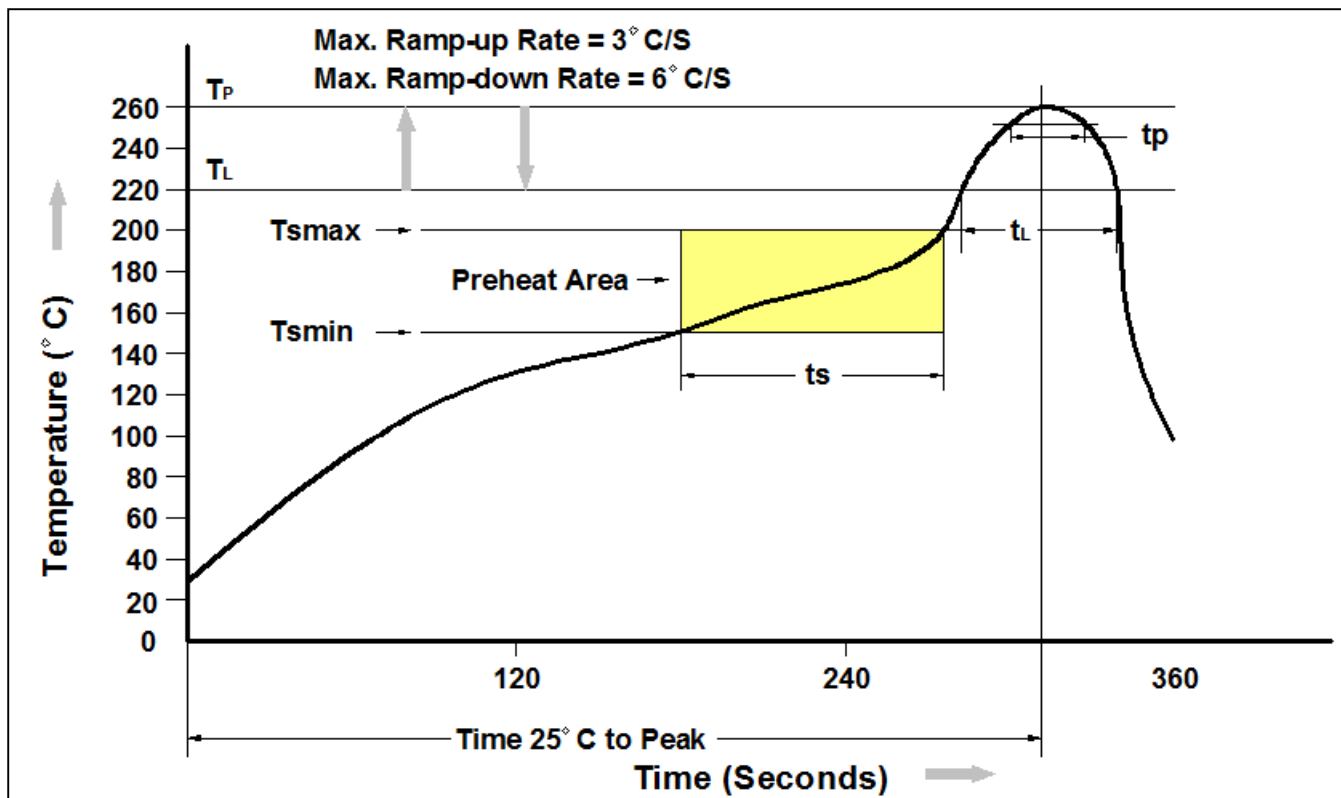

Profile Feature	Pb-Free Assembly Profile
Temperature Min. (Tsmin)	150°C
Temperature Max. (Tsmax)	200°C
Time (ts) from (Tsmin to Tsmax)	60-120 seconds
Ramp-up Rate (tL to tP)	3°C/second max.
Liquidous Temperature (TL)	217°C
Time (tL) Maintained Above (TL)	60 – 150 seconds
Peak Body Package Temperature	260°C +0°C / -5°C
Time (tP) within 5°C of 260°C	30 seconds
Ramp-down Rate (TP to TL)	6°C/second max
Time 25°C to Peak Temperature	8 minutes max.



CT Micro

4N2X, 4N3X, H11AX 6Pin Photo Transistor Coupler

DISCLAIMER

CT MICRO RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. CT MICRO DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

DISCOLORATION MIGHT OCCUR ON THE PACKAGE SURFACE AFTER SOLDERING, REFLOW OR LONG TERM USE. THIS DOES NOT IMPACT THE PRODUCT PERFORMANCE NOR THE PRODUCT RELIABILITY.

CT MICRO ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT EXPRESS WRITTEN APPROVAL OF CT MICRO INTERNATIONAL CORPORATION.

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instruction for use provided in the labelling, can be reasonably expected to result in significant injury to the user.*
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.*