



CT Micro

CT303X, CT304X, CT306X, CT308X 6Pin Zero Cross TRIAC Driver Coupler

Features

- High isolation 5000 VRMS
- Peak Breakdown Voltage
 - 250V – CT303X
 - 400V – CT304X
 - 600V – CT306X
 - 800V – CT308X
- Temperature range - 55 °C to 100 °C


Applications

- Motor Controls
- Lamp ballasts
- Static AC Power Switch
- Solenoid/ Valve Control

Description


The CT303X, CT304X, CT306X and CT308X series consists of a Zero Cross Photo Triac optically coupled to a gallium arsenide Infrared-emitting diode in a 6-lead DIP package with bending options.

Package Outline

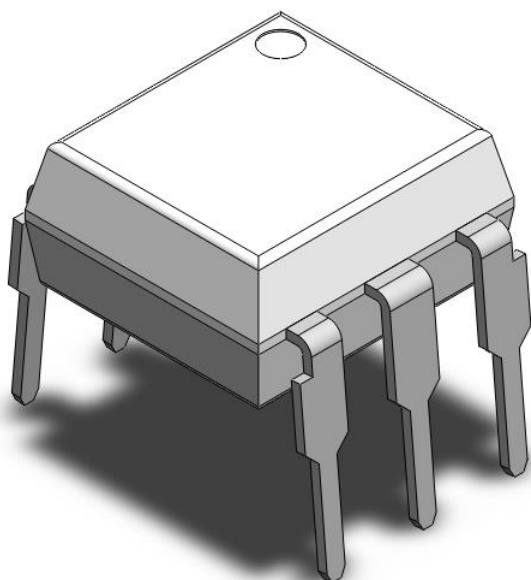

Note: Different bending options available. See package dimension.

Schematic

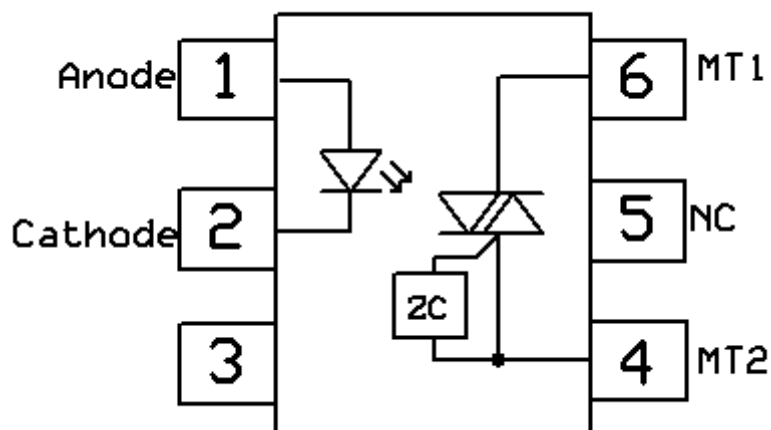



CT303X, CT304X, CT306X, CT308X

6Pin Zero Cross TRIAC Driver Coupler

CT Micro

Absolute Maximum Rating at 25°C

Symbol	Parameters		Ratings	Units	Notes
V _{ISO}	Isolation voltage		5000	V _{RMS}	
T _{OPR}	Operating temperature		-55 ~ +100	°C	
T _{STG}	Storage temperature		-55 ~ +125	°C	
T _{SOL}	Soldering temperature		260	°C	
Emitter					
I _F	Forward current		60	mA	
I _{F(TRANS)}	Peak transient current (≤1μs P.W,300pps)		1	A	
V _R	Reverse voltage		6	V	
P _D	Power dissipation		100	mW	
Detector					
P _D	Power dissipation		300	mW	
V _{DRM}	Off-State Output Terminal Voltage	CT303X	250	V	
		CT304X	400	V	
		CT306X	600	V	
		CT308X	800	V	
I _{TSM}	Peak Repetitive Surge Current		1	A	



CT303X, CT304X, CT306X, CT308X

6Pin Zero Cross TRIAC Driver Coupler

CT Micro

Electrical Characteristics $T_A = 25^\circ\text{C}$ (unless otherwise specified)

Emitter Characteristics

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
V_F	Forward voltage	$I_F = 10\text{mA}$		1.2	1.4	V	
I_R	Reverse Current	$V_R = 6\text{V}$	-	-	5	μA	
C_{IN}	Input Capacitance	$f = 1\text{MHz}$	-	45	-	pF	

Detector Characteristics

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
I_{DRM1}	Peak Blocking Current	CT303X, CT304X	-	-	100	nA	
		CT306X, CT308X	-	-	500		
I_{DRM2}	Inhibit Leakage Current	$I_F = \text{Rated } I_{FT}, V_{DRM} = \text{Rated } V_{DRM}$			500	μA	
V_{TM}	Peak On-State Voltage	$I_F = \text{Rated } I_{FT}, I_{TM} = 100\text{mA}$	-	-	3	V	
dv/dt	Critical Rate of Rise off-State Voltage	CT303X, CT304X, CT306X	1000	-	-	$\text{V}/\mu\text{s}$	
		CT308X	600	-	-		

Transfer Characteristics

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
I_{FT}	Input Trigger Current	CT3031, CT3041, CT3061, CT3081	-	-	15	V	
		CT3032, CT3042, CT3062, CT3082	-	-	10		
		CT3033, CT3043, CT3063, CT3083	-	-	5		
I_H	Holding Current		-	270	-	μA	
R_{IO}	Isolation Resistance	$V_{IO} = 500\text{V}_{DC}$	1×10^{11}			Ω	
C_{IO}	Isolation Capacitance	$f = 1\text{MHz}$		0.25		pF	



CT Micro

CT303X, CT304X, CT306X, CT308X

6Pin Zero Cross TRIAC Driver Coupler

Typical Characteristic Curves

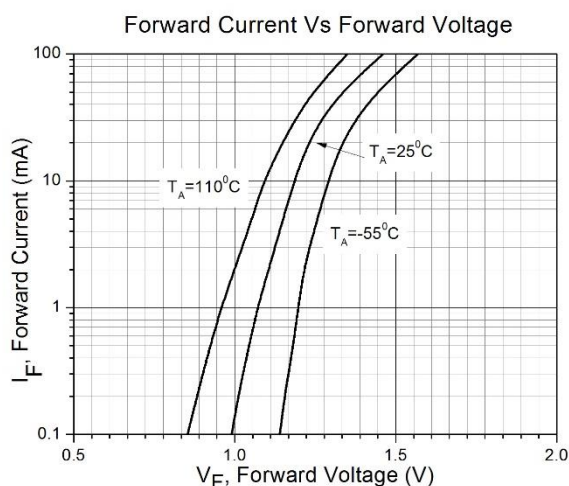


Figure 1

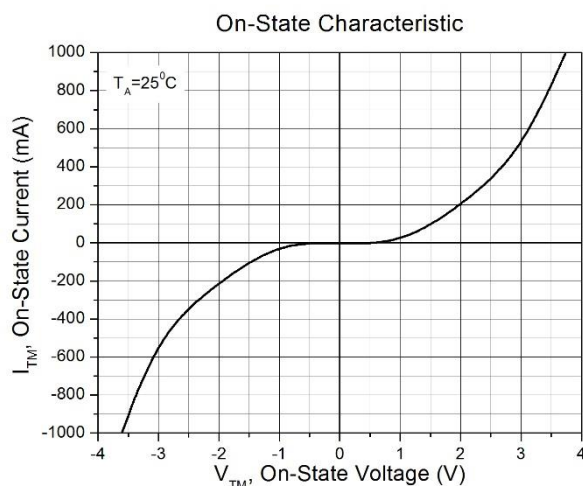


Figure 2

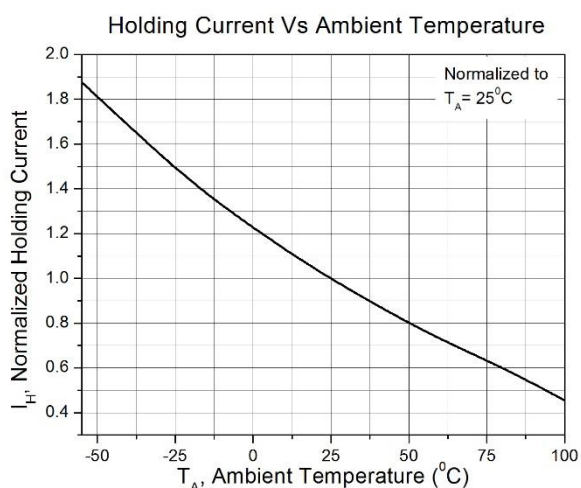


Figure 3

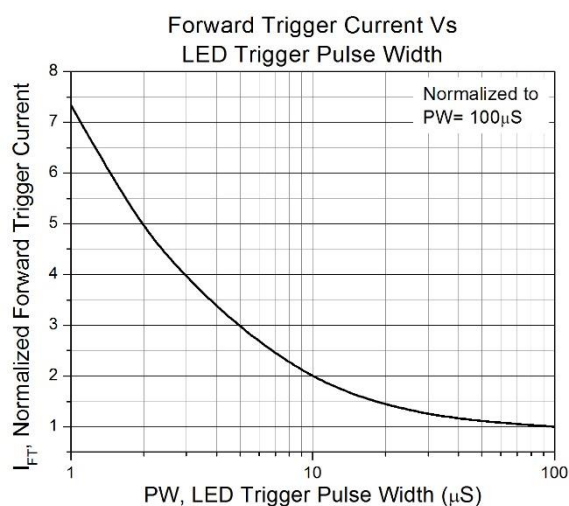


Figure 4

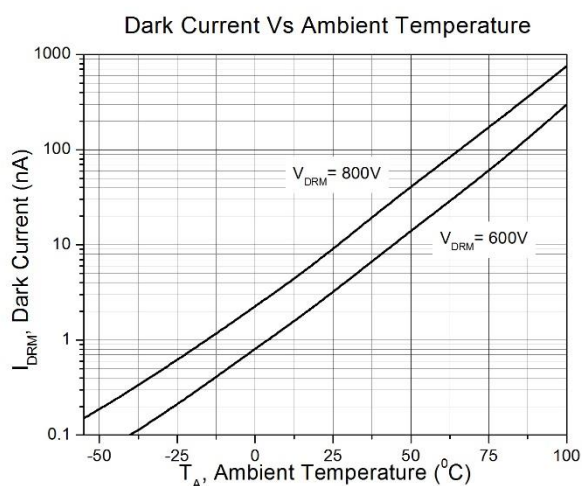


Figure 5

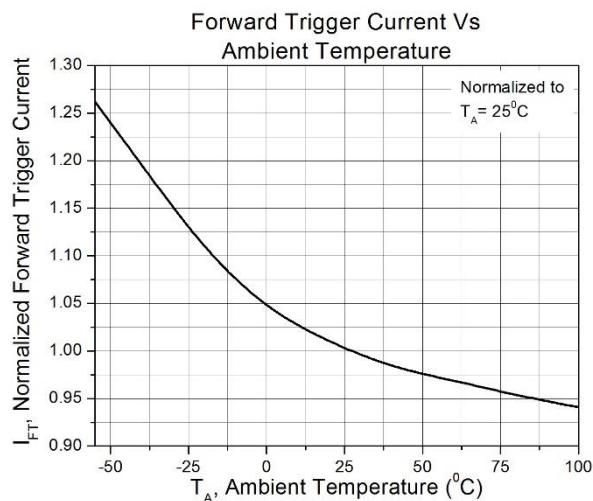


Figure 6



CT303X, CT304X, CT306X, CT308X

6Pin Zero Cross TRIAC Driver Coupler

CT Micro

Off-State Voltage Vs Ambient Temperature

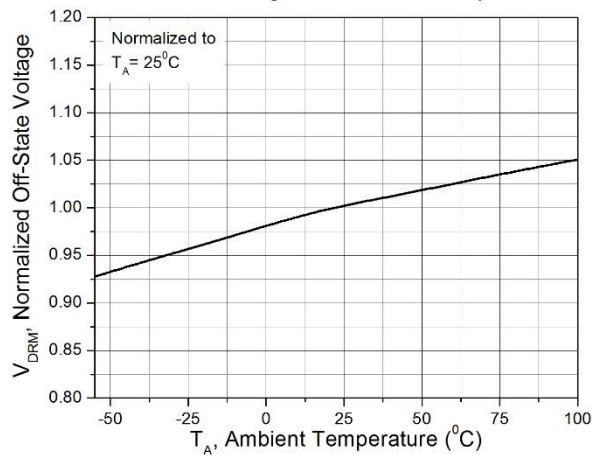


Figure 7

Leakage Current @ Inhibit State Vs Ambient Temperature

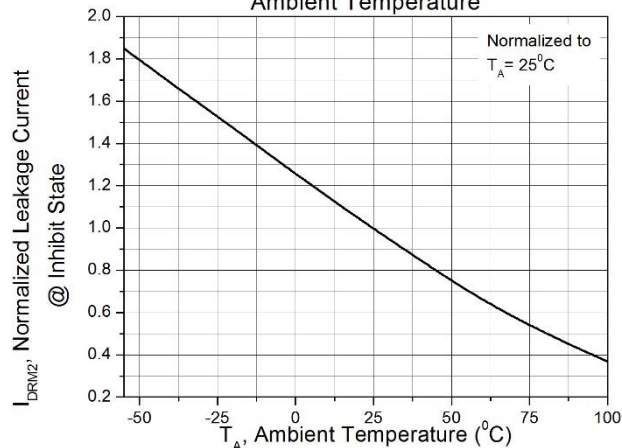


Figure 8

Inhibit Voltage Vs Ambient Temperature

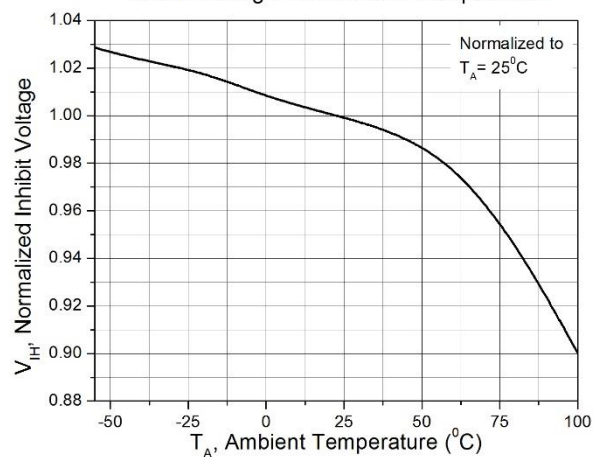


Figure 9




CT303X, CT304X, CT306X, CT308X 6Pin Zero Cross TRIAC Driver Coupler


CT Micro

Package Dimension *Dimensions in mm unless otherwise stated*

Standard DIP – Through Hole

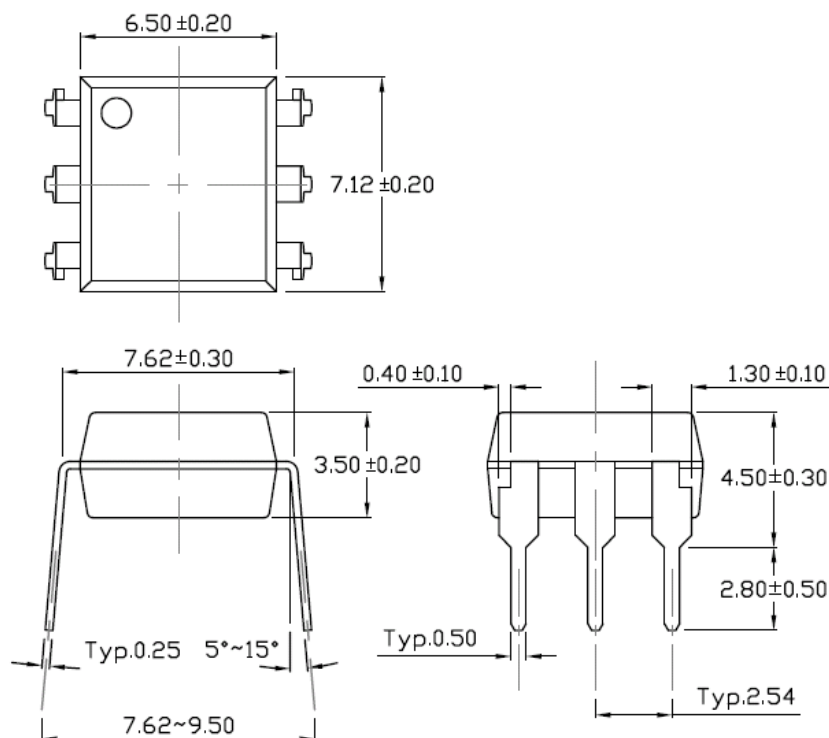

Wide Lead Forming – Through Hole

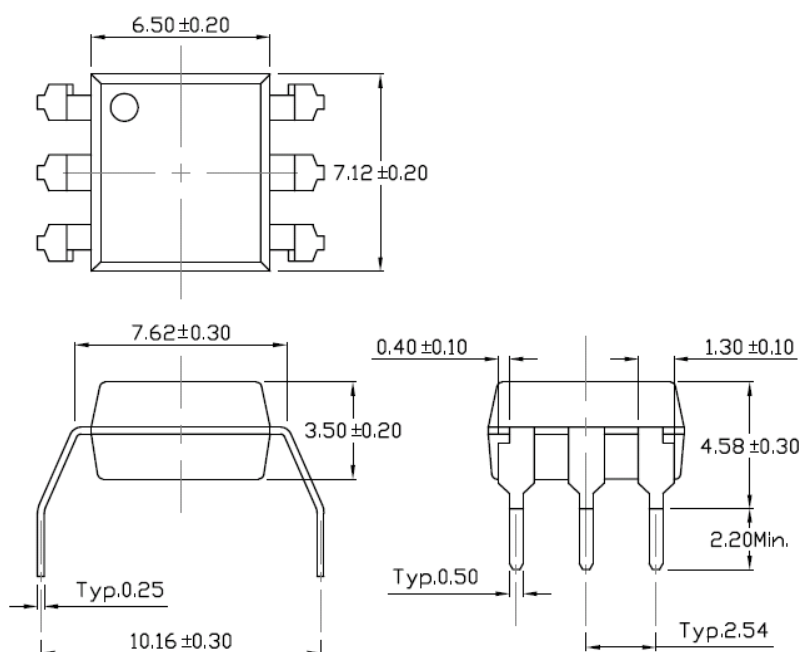





CT303X, CT304X, CT306X, CT308X 6Pin Zero Cross TRIAC Driver Coupler

CT Micro

Surface Mount Forming

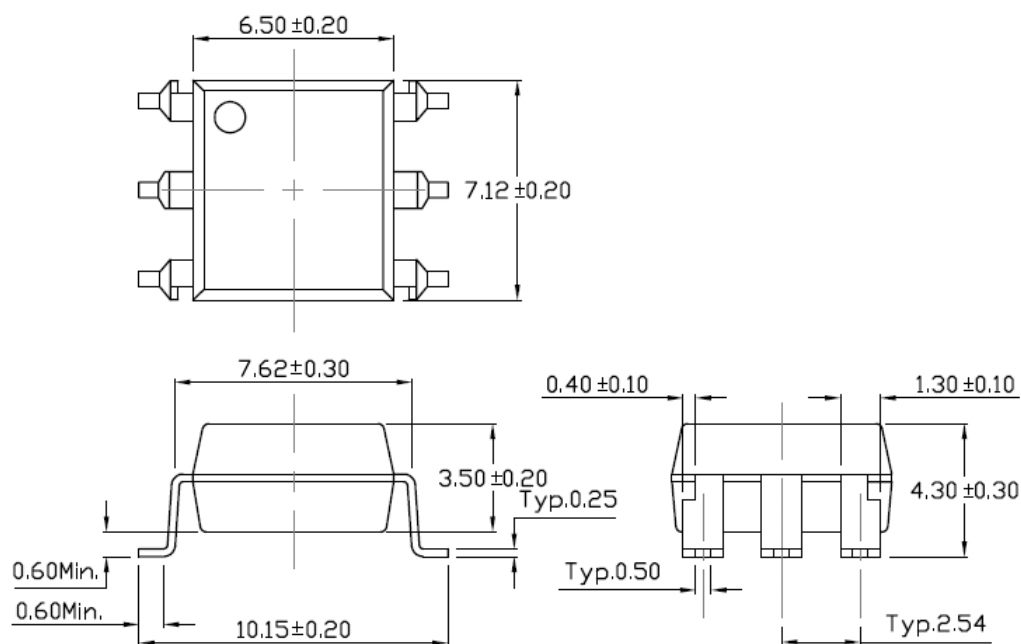

Surface Mount Forming (Low Profile)

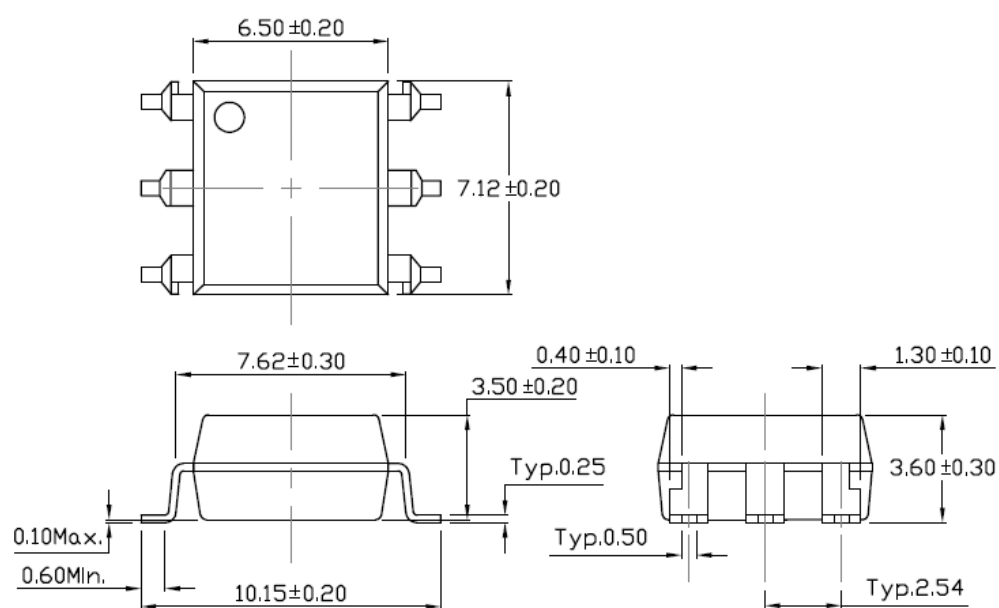





CT Micro

CT303X, CT304X, CT306X, CT308X 6Pin Zero Cross TRIAC Driver Coupler

Recommended Solder Mask Dimensions in mm unless otherwise stated

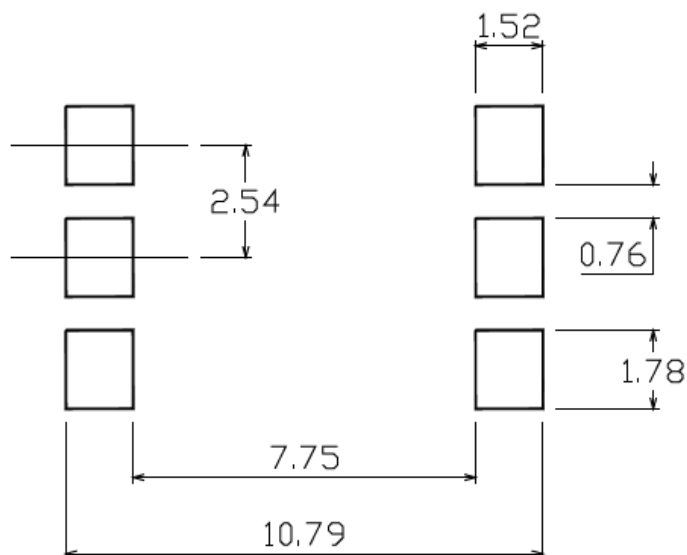

Marking Information

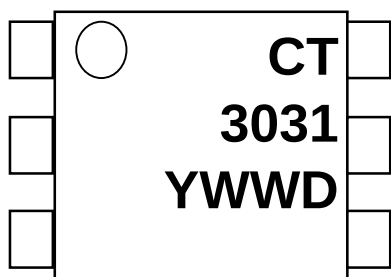

Note:

CT : Logo
3031 : Part Number
Y : Fiscal Year
WW : Work Week
D : Manufacturing Code



CT Micro

CT303X, CT304X, CT306X, CT308X 6Pin Zero Cross TRIAC Driver Coupler

Ordering Information

CT303X(Y)(Z)-G, CT304X(Y)(Z)-G, CT306X(Y)(Z)-G, CT308X(Y)(Z)-G

X = (1,2,3)

Y = Lead form option (S, SL, M or none)

Z = Tape and reel option (TA, TB or none)

G= Material option (G: Green, None: Non-green)


Option	Description	Quantity
None	Standard 6 Pin Dip	50Units/Tube
M	Wide Lead Forming	50Units/Tube
S(TA)	Surface Mount Lead Forming – With Option A Taping	1000 Units/Reel
S(TB)	Surface Mount Lead Forming – With Option B Taping	1000 Units/Reel
SL(TA)	Surface Mount Lead Forming(Low Profile) – With Option A Taping	1000 Units/Reel
SL(TB)	Surface Mount Lead Forming(Low Profile) – With Option B Taping	1000 Units/Reel



CT Micro

CT303X, CT304X, CT306X, CT308X 6Pin Zero Cross TRIAC Driver Coupler

Reflow Profile

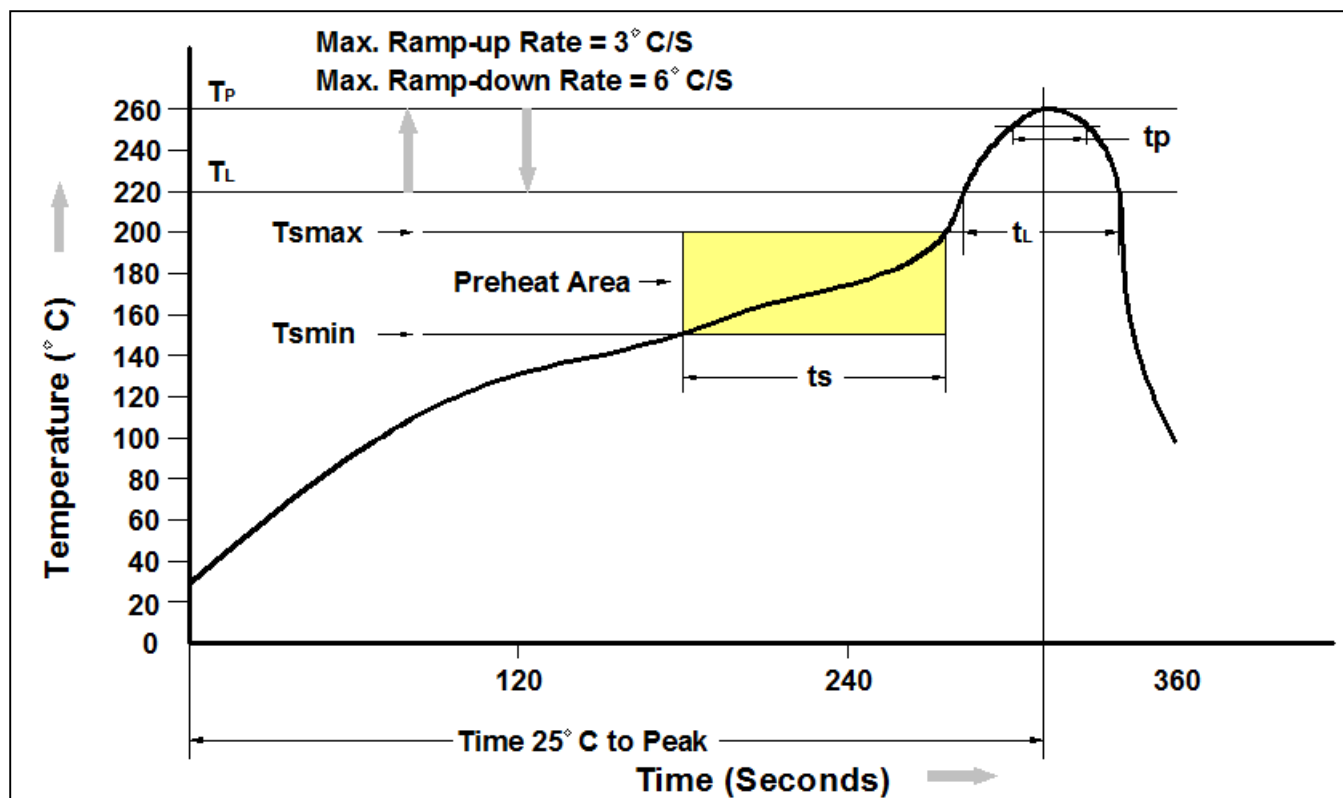

Profile Feature	Pb-Free Assembly Profile
Temperature Min. (T _{smin})	150°C
Temperature Max. (T _{smax})	200°C
Time (t _s) from (T _{smin} to T _{smax})	60-120 seconds
Ramp-up Rate (t _L to t _P)	3°C/second max.
Liquidous Temperature (T _L)	217°C
Time (t _L) Maintained Above (T _L)	60 – 150 seconds
Peak Body Package Temperature	260°C +0°C / -5°C
Time (t _P) within 5°C of 260°C	30 seconds
Ramp-down Rate (T _P to T _L)	6°C/second max
Time 25°C to Peak Temperature	8 minutes max.



CT303X, CT304X, CT306X, CT308X 6Pin Zero Cross TRIAC Driver Coupler

CT Micro

DISCLAIMER

CT MICRO RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. CT MICRO DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

DISCOLORATION MIGHT OCCUR ON THE PACKAGE SURFACE AFTER SOLDERING, REFLOW OR LONG TERM USE. THIS DOES NOT IMPACT THE PRODUCT PERFORMANCE NOR THE PRODUCT RELIABILITY.

CT MICRO ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT EXPRESS WRITTEN APPROVAL OF CT MICRO INTERNATIONAL CORPORATION.

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instruction for use provided in the labelling, can be reasonably expected to result in significant injury to the user.*
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.*