



# GRP161504-DTC2

## Dual Wavelength SMD Type Emitter

### Features

- Top view 1615 package
- Viewing Angle =  $\pm 65^\circ$
- Compatible with infrared and vapor phase reflow solder process
- High reliability
- Dual dominant wavelength (G=532nm , R=621nm)
- RoHS compliance



### Applications

- Optical indicator.
- Switch and Symbol Display.


### Description

The GRP161504-DTC2 is a double LED housed in a miniature SMD package. The device has a dominant wavelength of 532nm and 621nm LED.

### Package Outline

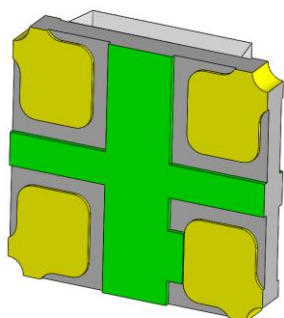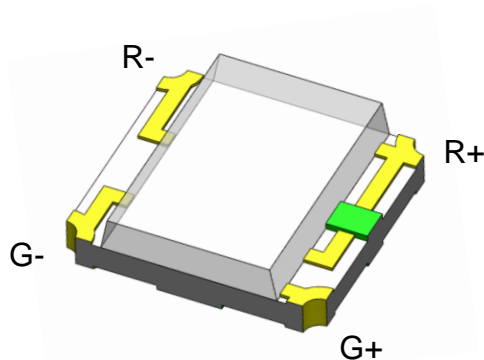

### Schematic

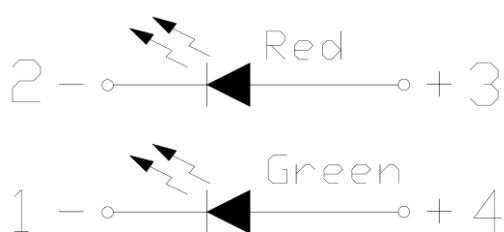



# GRP161504-DTC2

## Dual Wavelength SMD Type Emitter

### Absolute Maximum Rating at 25°C

Symbol	Parameters		Ratings	Units	Notes
I <sub>F</sub>	Continuous Forward Current	G	25	mA	
		R	25		
I <sub>FP</sub>	Peak Forward Current	G	100	mA	1
		R	60		
V <sub>R</sub>	Reverse Voltage		5	V	
T <sub>opr</sub>	Operating Temperature		-40 ~ +85	°C	
T <sub>stg</sub>	Storage Temperature		-40 ~ +100	°C	
T <sub>sol</sub>	Soldering Temperature		260	°C	2
P <sub>D</sub>	Power Dissipation at(or below) 25°C Free Air Temperature	G	95	mW	
		R	60		

### Electro-Optical Characteristics *TA = 25°C (unless otherwise specified)*

#### Optical Characteristics (Green)

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
I <sub>v</sub>	Luminous Intensity	I <sub>F</sub> =2mA	90	-	225	mcd	3
λ <sub>d</sub>	Dominant Wavelength	I <sub>F</sub> =2mA	525	532	540	nm	4
θ <sub>1/2</sub>	Angle of Half Intensity	I <sub>F</sub> =2mA	-	±65	-	deg	

#### Electrical Characteristics

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
V <sub>F</sub>	Forward Voltage	I <sub>F</sub> =2mA	2.3	-	2.9	V	
I <sub>R</sub>	Reverse Current	V <sub>R</sub> =5V	-	-	1	μA	



# GRP161504-DTC2

## Dual Wavelength SMD Type Emitter

### Optical Characteristics (Red)

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
I <sub>v</sub>	Luminous Intensity	I <sub>F</sub> =2mA	11.5	-	28.5	mcd	3
λ <sub>d</sub>	Dominant Wavelength	I <sub>F</sub> =2mA	615	621	625	nm	
θ <sub>1/2</sub>	Angle of Half Intensity	I <sub>F</sub> =2mA	-	±65	-	deg	

### Electrical Characteristics

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
V <sub>F</sub>	Forward Voltage	I <sub>F</sub> =2mA	1.6	-	2.1	V	
I <sub>R</sub>	Reverse Current	V <sub>R</sub> =5V	-	-	1	μA	

#### Notes:

1. I<sub>FP</sub> Conditions--Pulse Width ≤ 100μs and Duty ≤ 10%.
2. Soldering time ≤ 10 seconds.
3. Bin Range of Luminous Intensity

Green				
Bin Code	Min	Max	Unit	Condition
QA	90	140	mcd	I <sub>F</sub> =2mA
RA	140	225		
Red				
L	11.5	18.0	mcd	I <sub>F</sub> =2mA
M	18.0	28.5		

Tolerance of: Luminous Intensity ±10%

4. Bin Range of Dominant Wavelength

Green				
Bin Code	Min	Max	Unit	Condition
A6	525	530	nm	I <sub>F</sub> =2mA
A7	530	535		
A8	535	540		

Tolerance of Dominant Wavelength: ±1nm.

Tolerance of Forward Voltage ±0.1V.



## Typical Characteristic Curves

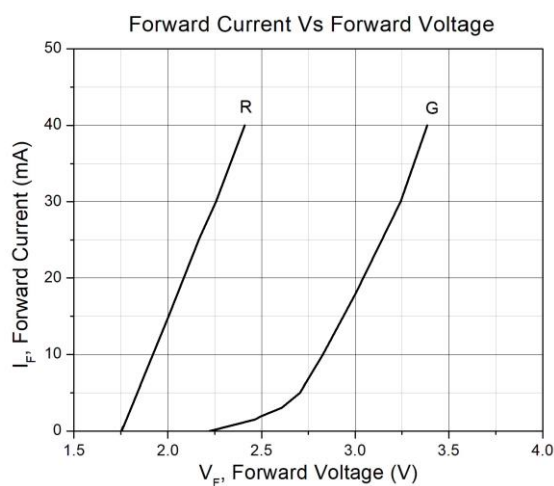


Figure 1

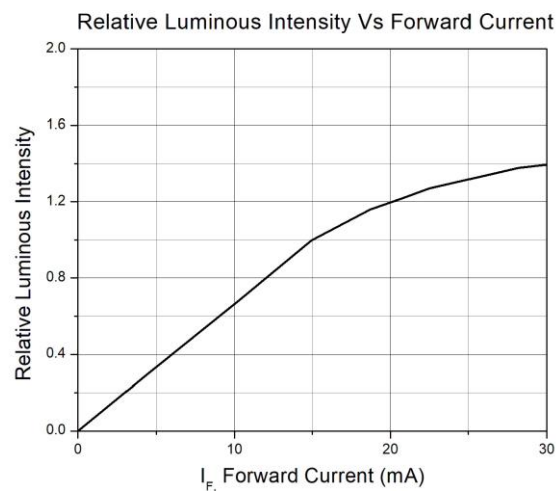


Figure 2

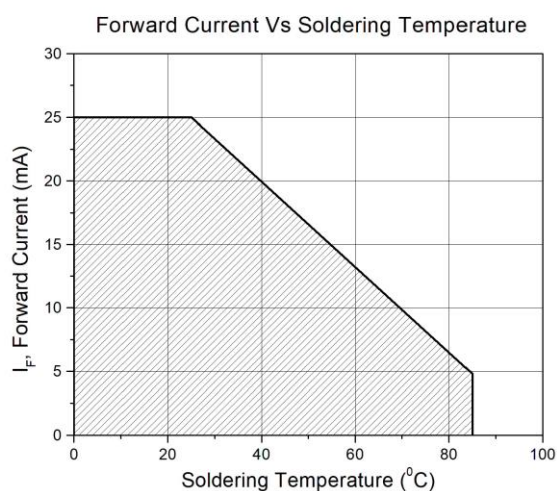


Figure 3

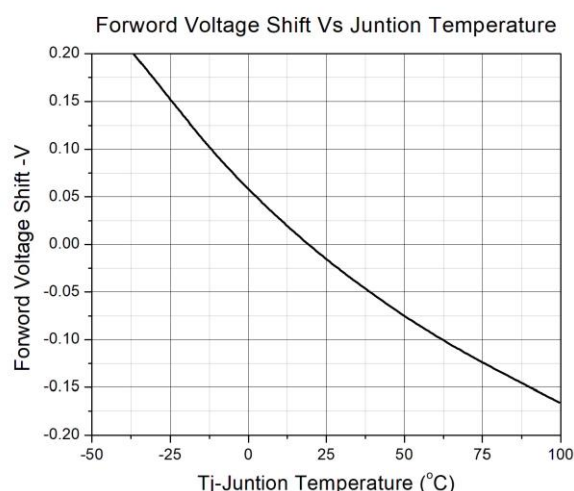


Figure 4

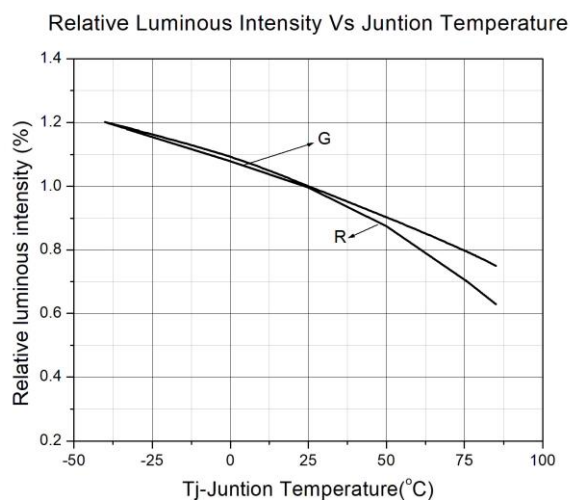


Figure 5

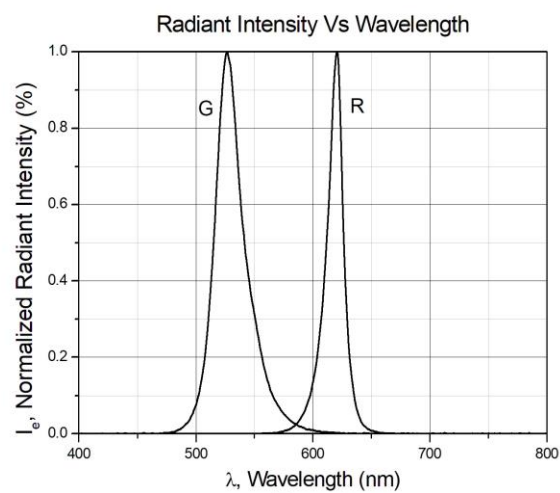



Figure 6



# GRP161504-DTC2


## Dual Wavelength SMD Type Emitter

### Typical Characteristic Curves

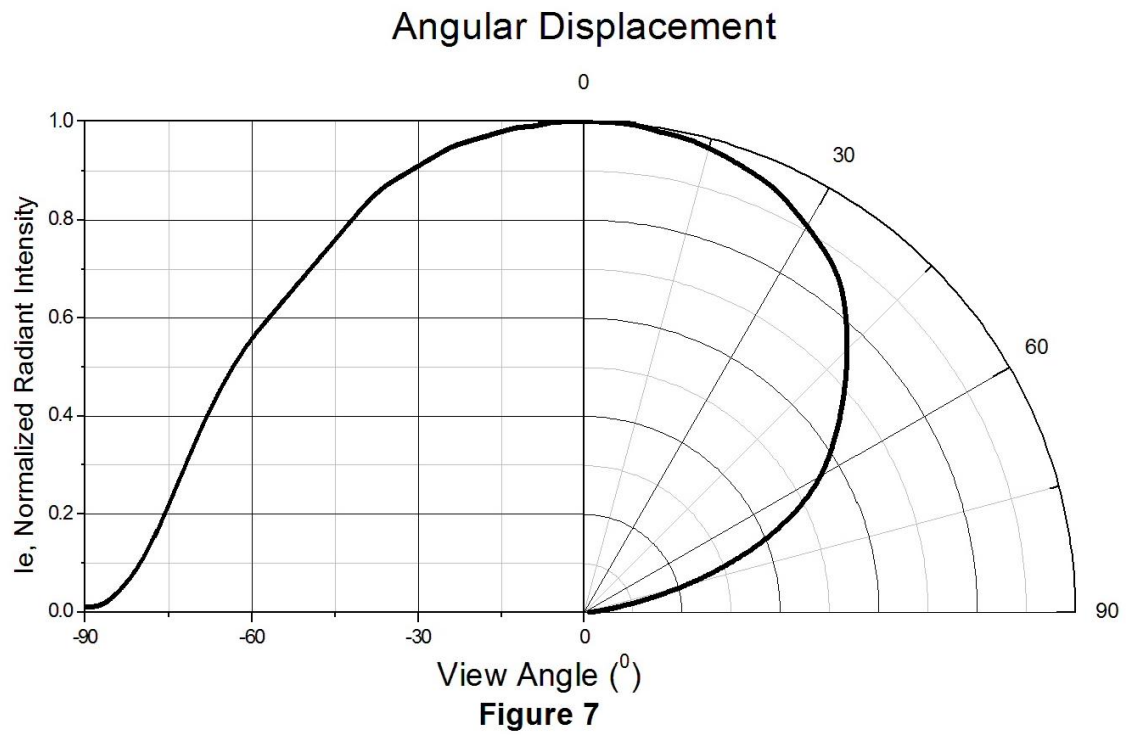




**Package Dimension** *All dimensions are in mm, unless otherwise stated*

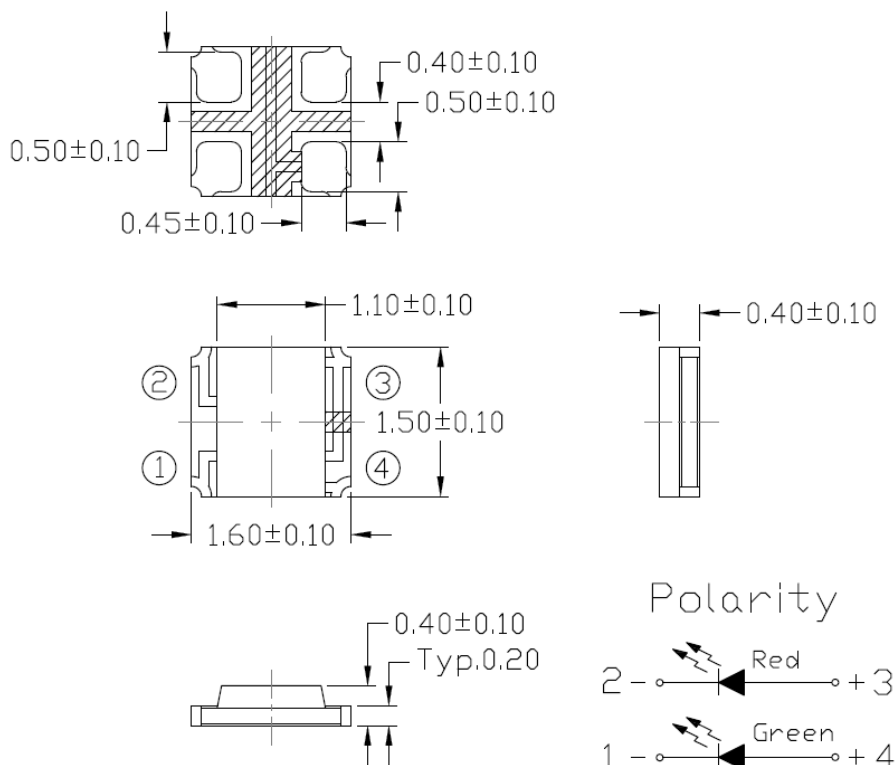

Note: Tolerance unless mentioned is  $\pm 0.1$ mm.

**Recommended Soldering Mask** *All dimensions are in mm, unless otherwise stated*



Note: Tolerance unless mentioned is  $\pm 0.1$ mm.

**Ordering Information**

Part Number	Description	Quantity
GRP161504-DTC2	Tape & Reel	2000 pcs




# GRP161504-DTC2

## Dual Wavelength SMD Type Emitter


### Reel Dimension

All dimensions are in mm, unless otherwise stated

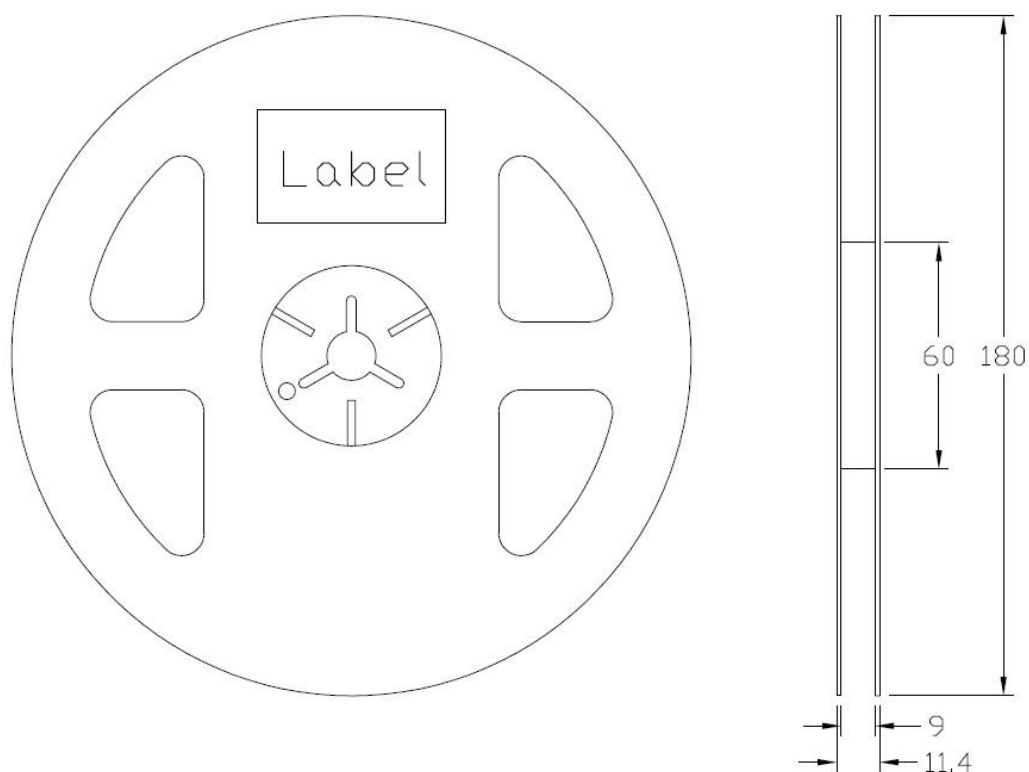

### Tape Dimension

All dimensions are in mm, unless otherwise stated

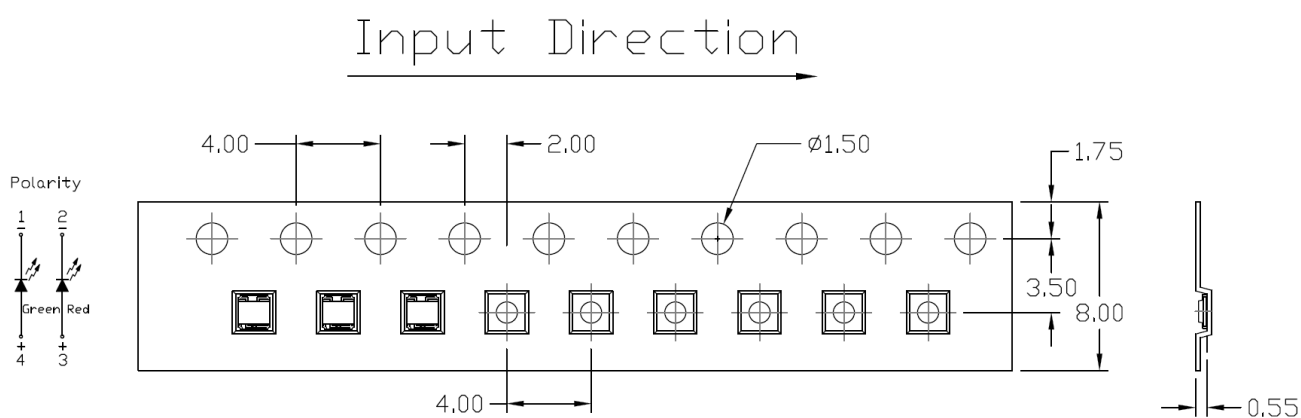

Note: Tolerance unless mentioned is  $\pm 0.1$ mm.



## Label Form Specification

CT Micro  
International Corporation

MSL-X  
MADE IN CHINA

CPN: XXXXXXXXXXXXXXXXX  
|||||

Part no: XXXXXXXXXXXXXXXX  
|||||

Serial no: XXXXXXXX  
|||||

Lot no: XXXXXXXX  
|||||

Qty: XXXXXX      Date Code: YWWJ  
|||||      |||||

IV: XX      WD:XX      VF:XX  
|||||      |||||      |||||

QR Code

Pb  
RoHS

CPN : Customer Part Number

Part no: CTM Production Number

Serial no: Production Number

Lot no: Lot number

Q'ty: Packing Quantity

Date Code: Manufacture Date

IV : Bin Code of Luminous Intensity

WD : Bin Code of Dominant Wavelength

VF : Bin Code of Forward Voltage

MADE IN CHINA: Production Place

## Storage Condition

1. Do not open moisture proof bag before the products are ready to use.
2. The moisture barrier bag should be stored at 30°C and 90%R.H. max. before opening.  
Shelf life of non-opened bag is 12 months after the bag sealing date.
3. After opening the moisture barrier bag floor life is 1 year at 30°C/60%RH. max. Unused LEDs should be resealed into moisture barrier bag. (Refer to J-STD-020 Standard)
4. If the moisture absorbent material has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the J-STD-033 Standard conditions.





## Reflow Profile



Profile Feature	Pb-Free Assembly Profile
Temperature Min. ( $T_{smin}$ )	150°C
Temperature Max. ( $T_{smax}$ )	200°C
Time ( $t_s$ ) from ( $T_{smin}$ to $T_{smax}$ )	60-120 seconds
Ramp-up Rate ( $t_L$ to $t_P$ )	3°C/second max.
Liquidous Temperature ( $T_L$ )	217°C
Time ( $t_L$ ) Maintained Above ( $T_L$ )	60 – 150 seconds
Peak Body Package Temperature	260°C +0°C / -5°C
Time ( $t_P$ ) within 5°C of 260°C	30 seconds
Ramp-down Rate ( $T_P$ to $T_L$ )	6°C/second max
Time 25°C to Peak Temperature	8 minutes max.



## DISCLAIMER

CT MICRO RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. CT MICRO DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

---

CT MICRO ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT EXPRESS WRITTEN APPROVAL OF CT MICRO INTERNATIONAL CORPORATION.

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instruction for use provided in the labelling, can be reasonably expected to result in significant injury to the user.*
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.*