



## RGP160406-NCSA3

### Dual Wavelength SMD Type Emitter

#### Features

- Side view 0602 package
- Viewing Angle =  $\pm 65^\circ$
- Compatible with infrared and vapor phase reflow solder process
- High reliability
- Dual dominant wavelength  
(R=620nm , G=520nm)
- RoHS compliance


#### Applications

- General lighting
- Indoor signage display applications
- Switch light
- Decorative and Entertainment lighting


#### Description

The RGP160406-NCSA3 is a double LED housed in a miniature SMD package. The device has a dominant wavelength of 620nm and 520nm LED.

#### Package Outline

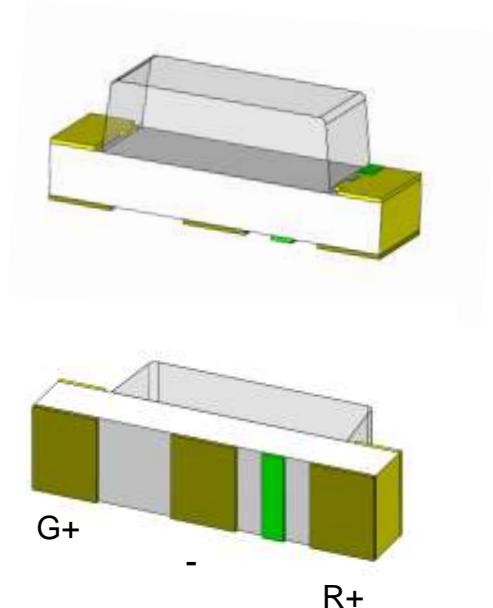

#### Schematic

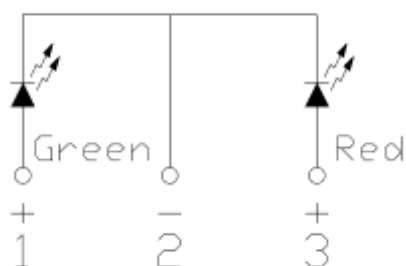

**Absolute Maximum Rating at 25°C**

<b>Symbol</b>	<b>Parameters</b>		<b>Ratings</b>	<b>Units</b>	<b>Notes</b>
I <sub>F</sub>	Continuous Forward Current	R	25	mA	
		G	25		
I <sub>FP</sub>	Peak Forward Current	R	60	mA	1
		G	60		
V <sub>R</sub>	Reverse Voltage		5	V	
T <sub>opr</sub>	Operating Temperature		-40 ~ +85	°C	
T <sub>stg</sub>	Storage Temperature		-40 ~ +100	°C	
T <sub>sol</sub>	Soldering Temperature		260	°C	2
P <sub>D</sub>	Power Dissipation at(or below) 25°C Free Air Temperature	R	60	mW	
		G	90		

**Electro-Optical Characteristics** *TA = 25°C (unless otherwise specified)***Optical Characteristics (Red)**

<b>Symbol</b>	<b>Parameters</b>	<b>Test Conditions</b>	<b>Min</b>	<b>Typ</b>	<b>Max</b>	<b>Units</b>	<b>Notes</b>
I <sub>v</sub>	Luminous Intensity	I <sub>F</sub> =5mA	18	-	45	mcd	3
λ <sub>d</sub>	Dominant Wavelength	I <sub>F</sub> =5mA	-	620	-	nm	
θ <sub>1/2</sub>	Angle of Half Intensity	I <sub>F</sub> =5mA	-	±65	-	deg	

**Electrical Characteristics (Red)**

<b>Symbol</b>	<b>Parameters</b>	<b>Test Conditions</b>	<b>Min</b>	<b>Typ</b>	<b>Max</b>	<b>Units</b>	<b>Notes</b>
V <sub>F</sub>	Forward Voltage	I <sub>F</sub> =5mA	1.6	-	2.2	V	
I <sub>R</sub>	Reverse Current	V <sub>R</sub> =5V	-	-	1	μA	

**Optical Characteristics (Green)**

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
I <sub>v</sub>	Luminous Intensity	I <sub>F</sub> =5mA	140	-	360	mcd	3
λ <sub>d</sub>	Dominant Wavelength	I <sub>F</sub> =5mA	515	-	530	nm	4
θ <sub>1/2</sub>	Angle of Half Intensity	I <sub>F</sub> =5mA	-	±65	-	deg	

**Electrical Characteristics (Green)**

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
V <sub>F</sub>	Forward Voltage	I <sub>F</sub> =5mA	2.5	-	3.1	V	
I <sub>R</sub>	Reverse Current	V <sub>R</sub> =5V	-	-	1	μA	

**Notes:**

1. I<sub>FP</sub> Conditions--Pulse Width ≤ 100μs and Duty ≤ 10%.
2. Soldering time ≤ 10 seconds.
3. Bin Range of Luminous Intensity

Red				
Bin Code	Min	Max	Unit	Condition
M	18.0	28.5	mcd	I <sub>F</sub> =5mA
N	28.5	45.0		
Green				
RA	140	225	mcd	I <sub>F</sub> =5mA
SA	225	360		

Tolerance of Luminous Intensity ±10%

4. Bin Range of Dominant Wavelength

Green				
A4	515	520	nm	I <sub>F</sub> =5mA
A5	520	525		
A6	525	530		

Tolerance of Dominant Wavelength: ±1nm.



## Typical Characteristic Curves

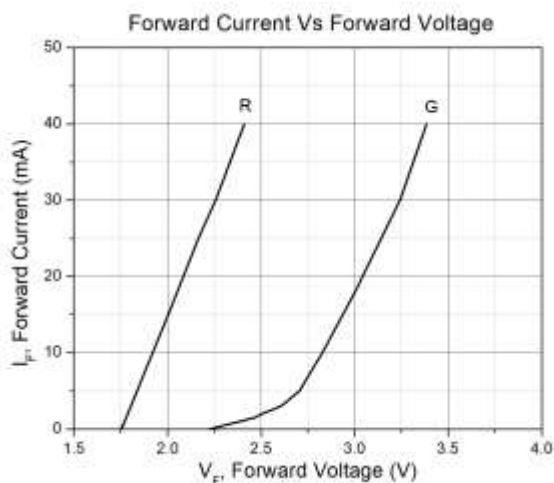


Figure 1

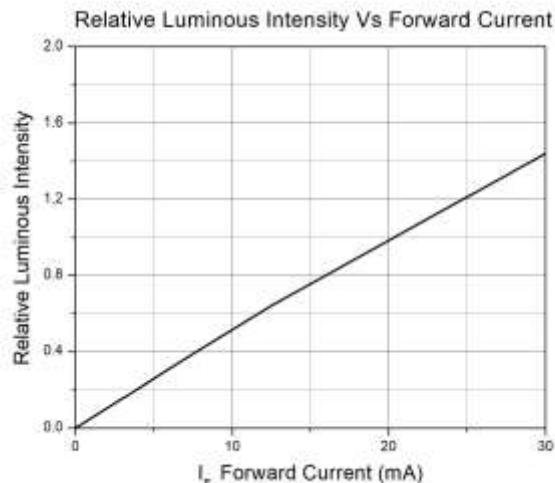


Figure 2

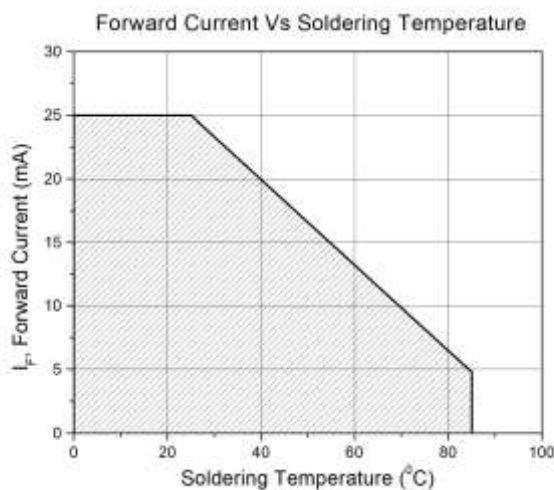


Figure 3

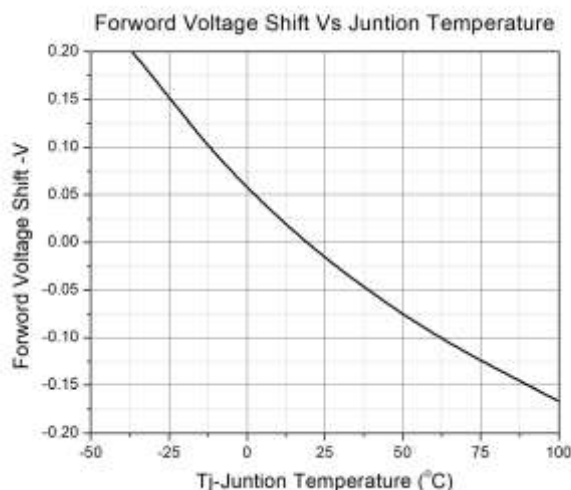


Figure 4

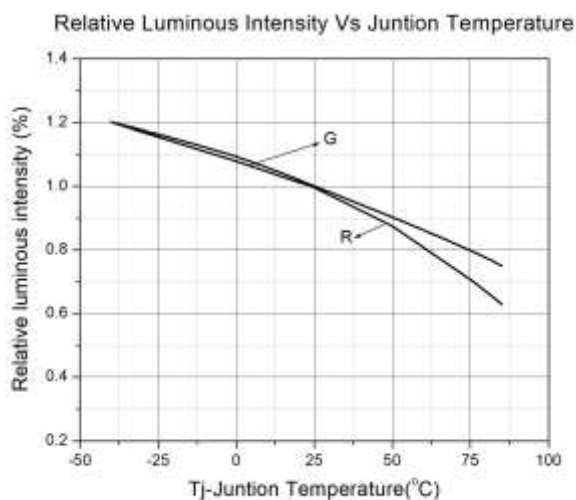


Figure 5


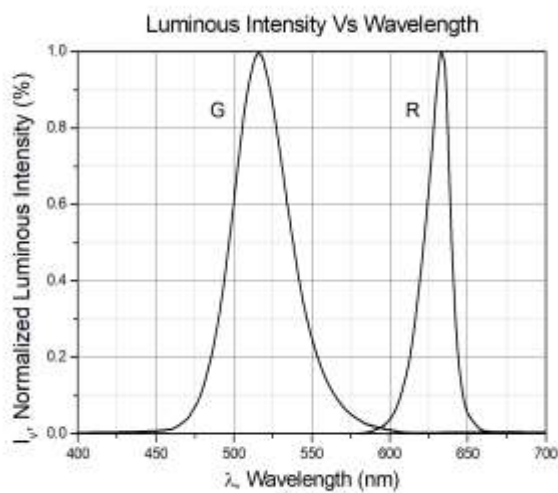


Figure 6




Typical Characteristic Curves



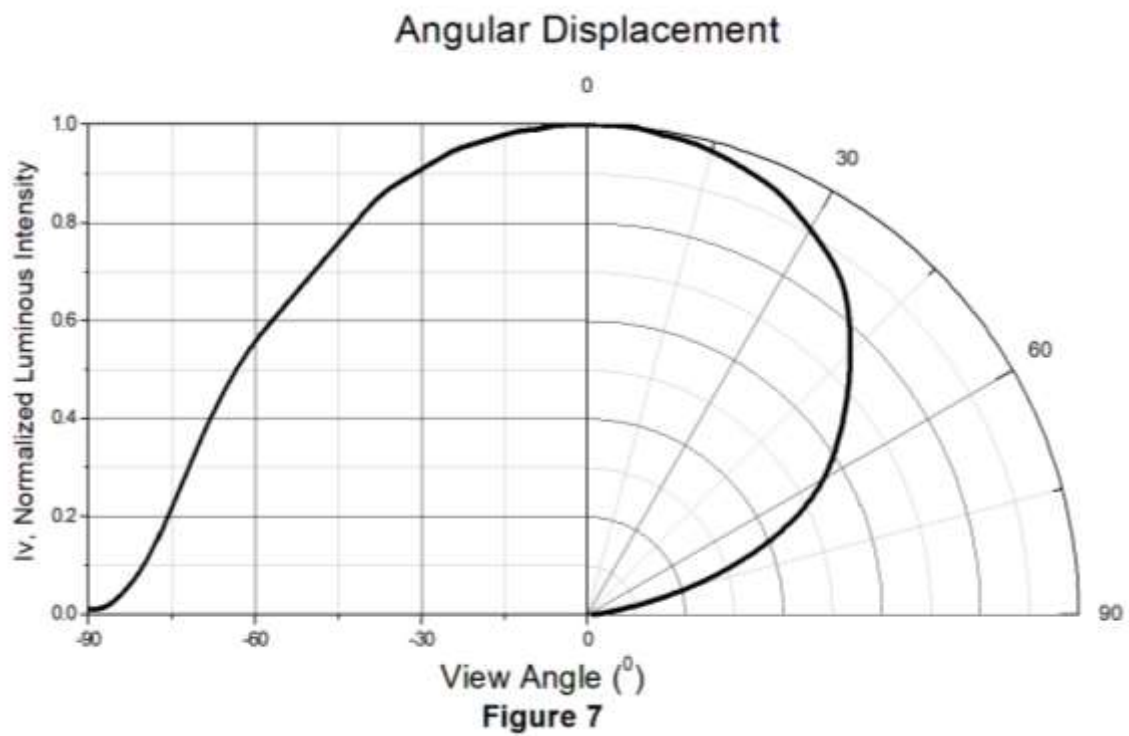


Package Dimension *All dimensions are in mm, unless otherwise stated*

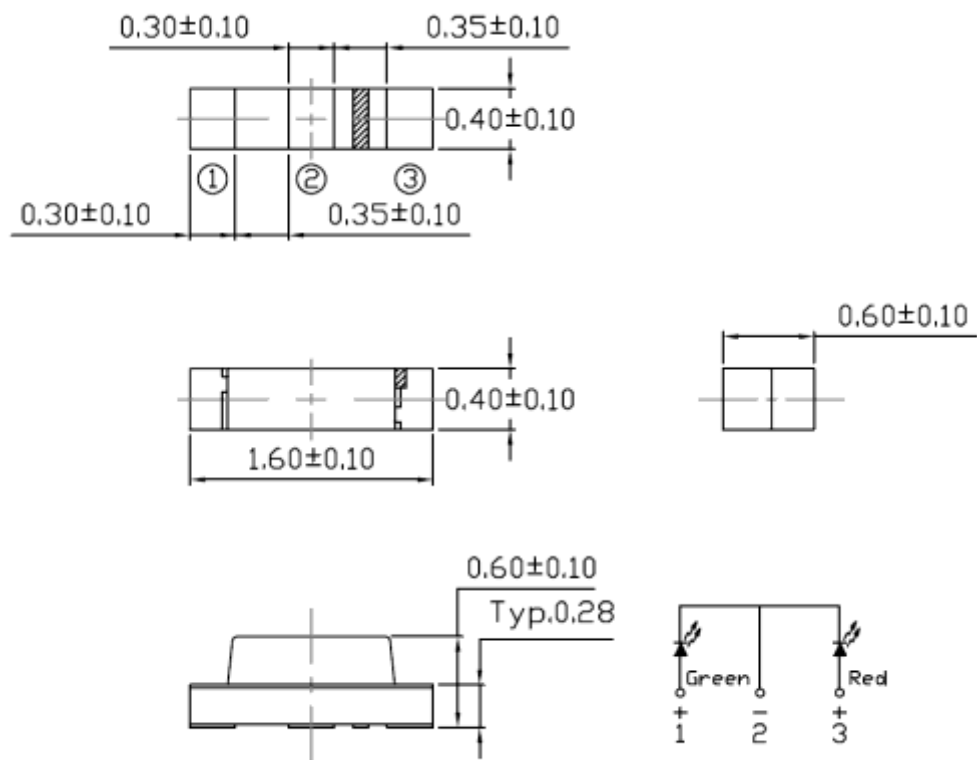

Note: Tolerance unless mentioned is ±0.1mm

Recommended Soldering Mask *All dimensions are in mm, unless otherwise stated*

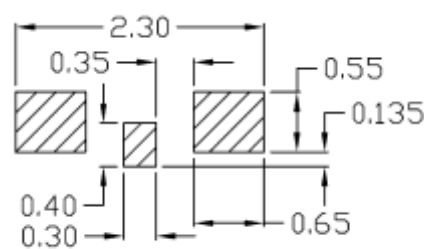

Note: Tolerance unless mentioned is ±0.1mm

Ordering Information


Part Number	Description	Quantity
RGP160406-NCSA3	Tape & Reel	3000 pcs




RGP160406-NCSA3

## Dual Wavelength SMD Type Emitter

**Reel Dimension** *All dimensions are in mm, unless otherwise stated*

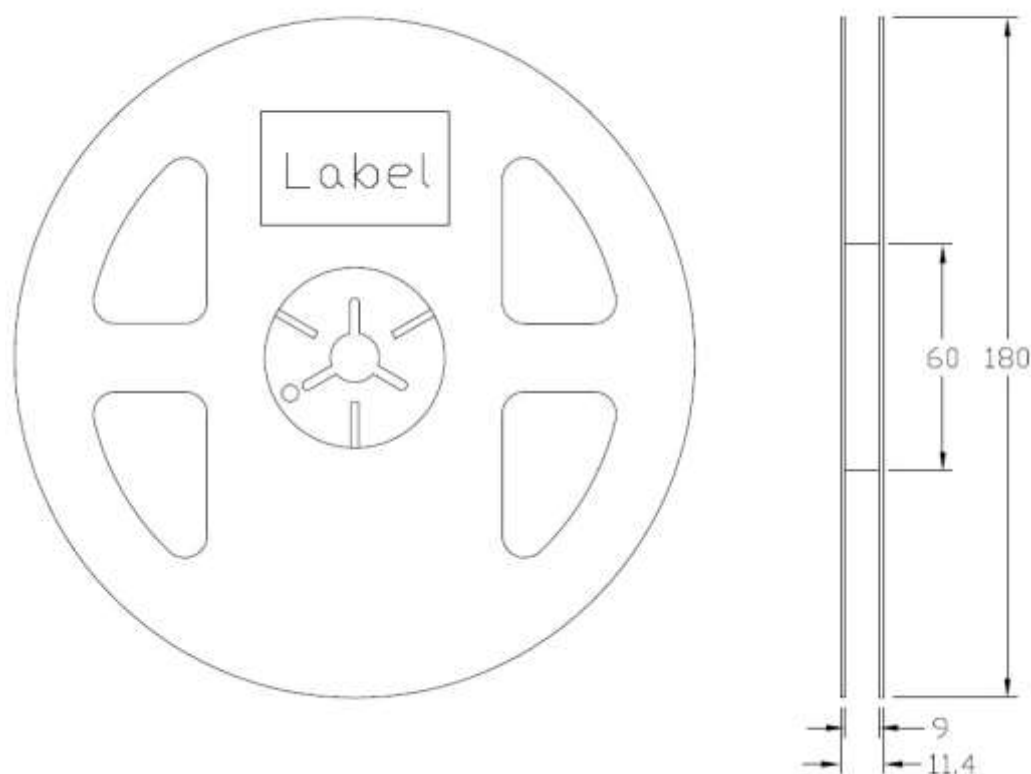


**Tape Dimension** *All dimensions are in mm, unless otherwise stated*

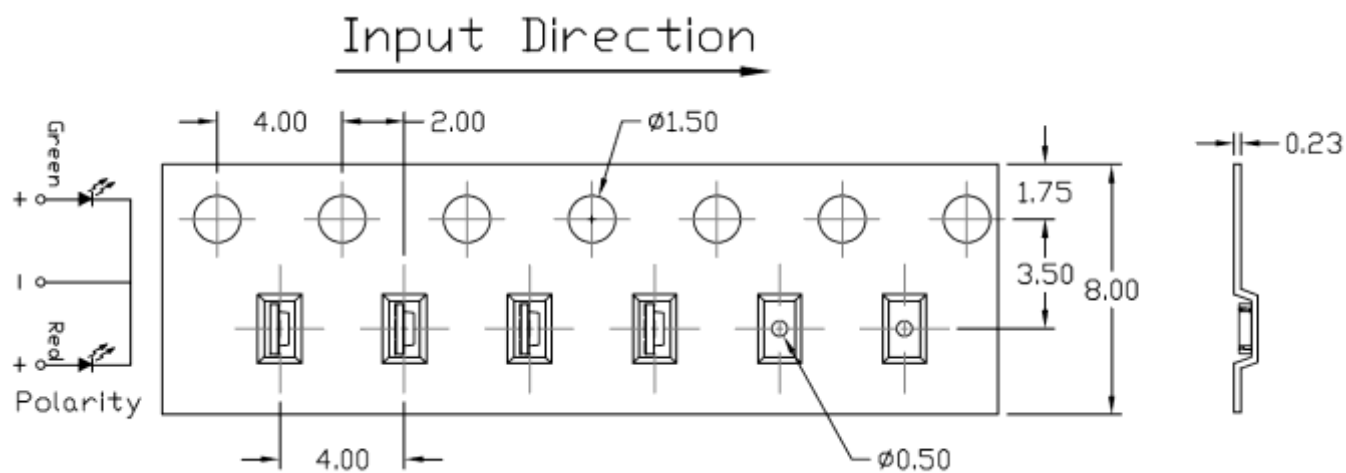

Note: Tolerance unless mentioned is  $\pm 0.1$ mm



## Label Form Specification

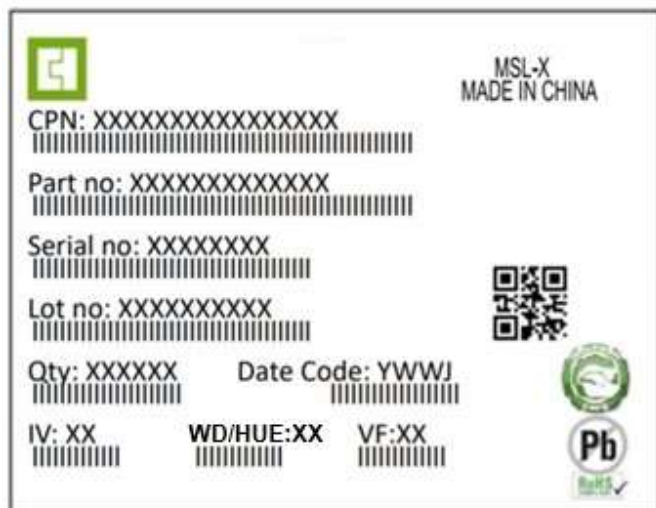

CPN : Customer Part Number  
Part no: CTM Production Number  
Serial no: Production Number  
Lot no: Lot number  
Q'ty: Packing Quantity  
Date Code: Manufacture Date  
IV : Bin Code of Luminous Intensity  
WD : Bin Code of Dominant Wavelength  
VF : Bin Code of Forward Voltage  
MADE IN CHINA: Production Place

## Storage Condition

1. Do not open moisture proof bag before the products are ready to use.
2. The moisture barrier bag should be stored at 30°C and 90%R.H. max. before opening.  
Shelf life of non-opened bag is 12 months after the bag sealing date.
3. After opening the moisture barrier bag floor life is 1 year at 30°C/60%RH. max. Unused LEDs should be resealed into moisture barrier bag. (Refer to J-STD-020 Standard)
4. If the moisture absorbent material has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the J-STD-033 Standard conditions.





## Reflow Profile



Profile Feature	Pb-Free Assembly Profile
Temperature Min. (Tsmin)	150°C
Temperature Max. (Tsmax)	200°C
Time (ts) from (Tsmin to Tsmax)	60-120 seconds
Ramp-up Rate (tL to tP)	3°C/second max.
Liquidous Temperature (TL)	217°C
Time (tL) Maintained Above (TL)	60 – 150 seconds
Peak Body Package Temperature	260°C +0°C / -5°C
Time (tP) within 5°C of 260°C	30 seconds
Ramp-down Rate (TP to TL)	6°C/second max
Time 25°C to Peak Temperature	8 minutes max.



## **DISCLAIMER**

**CT MICRO RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. CT MICRO DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.**

---

**CT MICRO ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT EXPRESS WRITTEN APPROVAL OF CT MICRO INTERNATIONAL CORPORATION.**

1. *Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instruction for use provided in the labelling, can be reasonably expected to result in significant injury to the user.*
2. *A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.*