



# RGWP161504-PCTC2

## Multi-Wavelength SMD Type

### Features

- Top view 1615 package
- Wide viewing angle
- RGB individual control
- High reliability
- RoHS compliance



### Applications

- General lighting
- Indoor signage display applications
- Switch light
- Decorative and Entertainment lighting


### Description

The RGWP161504-PCTC2 is a high brightness device designed for demanding applications in efficiency and reduced space. An ideal device in emphasizing visual effects, advertisement, decoration as well as general backlighting needs.

### Package Outline

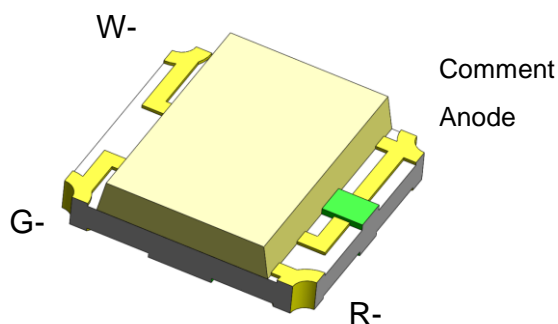

### Schematic





# RGWP161504-PCTC2

## Multi-Wavelength SMD Type

### Absolute Maximum Rating at 25°C

| Symbol           | Parameters   |   | Ratings    | Units | Notes |
|------------------|--|---|------------|-------|-------|
| I <sub>F</sub>   | Continuous Forward Current                               | R | 25         | mA    |       |
|                  |  | G | 25         |       |       |
|                  |  | W | 25         |       |       |
| I <sub>FP</sub>  | Peak Forward Current                                     | R | 60         | mA    | 1     |
|                  |  | G | 60         |       |       |
|                  |  | W | 60         |       |       |
| V <sub>R</sub>   | Reverse Voltage  |   | 10         | V     |       |
| T <sub>opr</sub> | Operating Temperature                                    |   | -40 ~ +85  | °C    |       |
| T <sub>stg</sub> | Storage Temperature                                      |   | -40 ~ +100 | °C    |       |
| T <sub>sol</sub> | Soldering Temperature                                    |   | 260        | °C    | 2     |
| P <sub>D</sub>   | Power Dissipation at(or below) 25°C Free Air Temperature | R | 60         | mW    |       |
|                  |  | G | 95         |       |       |
|                  |  | W | 95         |       |       |

### Electro-Optical Characteristics *T<sub>A</sub> = 25°C (unless otherwise specified)*

#### Optical Characteristics (Red)

| Symbol           | Parameters              | Test Conditions     | Min  | Typ | Max | Units | Notes |
|------------------|-------------------------|---------------------|------|-----|-----|-------|-------|
| I <sub>v</sub>   | Luminous Intensity      | I <sub>F</sub> =5mA | 28.5 | -   | 72  | mcd   | 3     |
| λ <sub>p</sub>   | Peak Wavelength         | I <sub>F</sub> =5mA | -    | 617 | -   | nm    |       |
| λ <sub>d</sub>   | Dominant Wavelength     | I <sub>F</sub> =5mA | -    | 622 | -   | nm    |       |
| θ <sub>1/2</sub> | Angle of Half Intensity | I <sub>F</sub> =5mA | -    | ±65 | -   | deg   |       |

#### Electrical Characteristics (Red)

| Symbol         | Parameters      | Test Conditions     | Min | Typ | Max | Units | Notes |
|----------------|-----------------|---------------------|-----|-----|-----|-------|-------|
| V <sub>F</sub> | Forward Voltage | I <sub>F</sub> =5mA | 1.6 | -   | 2.3 | V     |       |
| I <sub>R</sub> | Reverse Current | V <sub>R</sub> =5V  | -   | -   | 1   | μA    |       |



## RGWP161504-PCTC2

### Multi-Wavelength SMD Type

#### Optical Characteristics (Green)

| Symbol           | Parameters              | Test Conditions     | Min | Typ | Max | Units | Notes |
|------------------|-------------------------|---------------------|-----|-----|-----|-------|-------|
| I <sub>v</sub>   | Luminous Intensity      | I <sub>F</sub> =5mA | 225 | -   | 565 | mcd   | 3     |
| λ <sub>p</sub>   | Peak Wavelength         | I <sub>F</sub> =5mA | -   | 523 | -   | nm    |       |
| λ <sub>d</sub>   | Dominant Wavelength     | I <sub>F</sub> =5mA | 520 | -   | 535 | nm    | 4     |
| θ <sub>1/2</sub> | Angle of Half Intensity | I <sub>F</sub> =5mA | -   | ±65 | -   | deg   |       |

#### Electrical Characteristics (Green)

| Symbol         | Parameters      | Test Conditions     | Min | Typ | Max | Units | Notes |
|----------------|-----------------|---------------------|-----|-----|-----|-------|-------|
| V <sub>F</sub> | Forward Voltage | I <sub>F</sub> =5mA | 2.3 | -   | 3.0 | V     |       |
| I <sub>R</sub> | Reverse Current | V <sub>R</sub> =5V  | -   | -   | 1   | μA    |       |

#### Optical Characteristics (White)

| Symbol           | Parameters              | Test Conditions     | Min | Typ | Max | Units | Notes |
|------------------|-------------------------|---------------------|-----|-----|-----|-------|-------|
| I <sub>v</sub>   | Luminous Intensity      | I <sub>F</sub> =5mA | 140 | -   | 360 | mcd   | 3     |
| λ <sub>p</sub>   | Peak Wavelength         | I <sub>F</sub> =5mA | -   | -   | -   | nm    |       |
| λ <sub>d</sub>   | Dominant Wavelength     | I <sub>F</sub> =5mA | -   | -   | -   | nm    |       |
| θ <sub>1/2</sub> | Angle of Half Intensity | I <sub>F</sub> =5mA | -   | ±65 | -   | deg   |       |

#### Electrical Characteristics (White)

| Symbol         | Parameters      | Test Conditions     | Min | Typ | Max | Units | Notes |
|----------------|-----------------|---------------------|-----|-----|-----|-------|-------|
| V <sub>F</sub> | Forward Voltage | I <sub>F</sub> =5mA | 2.5 | -   | 3.2 | V     |       |
| I <sub>R</sub> | Reverse Current | V <sub>R</sub> =5V  | -   | -   | 1   | μA    |       |

#### Notes:

1. I<sub>FP</sub> Conditions--Pulse Width ≤ 100μs and Duty ≤ 10%.
2. Soldering time ≤ 10 seconds.



## RGWP161504-PCTC2

### Multi-Wavelength SMD Type

#### 3. Bin Range of Luminous Intensity

| Red      |      |     |      |                     |
|----------|------|-----|------|---------------------|
| Bin Code | Min  | Max | Unit | Condition           |
| N        | 28.5 | 45  | mcd  | I <sub>F</sub> =5mA |
| P        | 45   | 72  |      |                     |
| Green    |      |     |      |                     |
| SA       | 225  | 360 | mcd  | I <sub>F</sub> =5mA |
| TA       | 360  | 565 |      |                     |
| White    |      |     |      |                     |
| Bin Code | Min  | Max | Unit | Condition           |
| RA       | 140  | 225 | mcd  | I <sub>F</sub> =5mA |
| SA       | 225  | 360 |      |                     |

Tolerance of Luminous Intensity  $\pm 10\%$

#### 4. Bin Range of Dominant Wavelength

| Green |     |     |    |                     |
|-------|-----|-----|----|---------------------|
| A5    | 520 | 525 | nm | I <sub>F</sub> =5mA |
| A6    | 525 | 530 |    |                     |
| A7    | 530 | 535 |    |                     |

Tolerance of Dominant Wavelength:  $\pm 1\text{nm}$ .




## RGWP161504-PCTC2

### Multi-Wavelength SMD Type

#### 5. Bin Range of Chromaticity Coordinates

| Bin Code | CIE_x  | CIE_y  | Bin Code | CIE_x  | CIE_y  |
|----------|--------|--------|----------|--------|--------|
| A        | 0.2590 | 0.2008 | B        | 0.2723 | 0.2272 |
|          | 0.2590 | 0.2508 |          | 0.2723 | 0.2772 |
|          | 0.2723 | 0.2772 |          | 0.2856 | 0.3036 |
|          | 0.2723 | 0.2272 |          | 0.2856 | 0.2536 |
| C        | 0.2856 | 0.2536 | D        | 0.2989 | 0.2800 |
|          | 0.2856 | 0.3036 |          | 0.2989 | 0.3300 |
|          | 0.2989 | 0.3300 |          | 0.3122 | 0.3564 |
|          | 0.2989 | 0.2800 |          | 0.3122 | 0.3064 |

#### The C.I.E 1931 Chromaticity Diagram

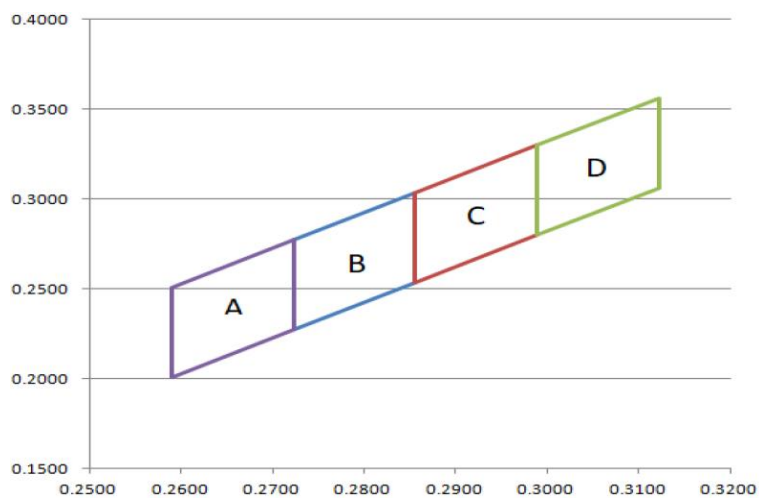



# RGWP161504-PCTC2

## Multi-Wavelength SMD Type

### Typical Characteristic Curves

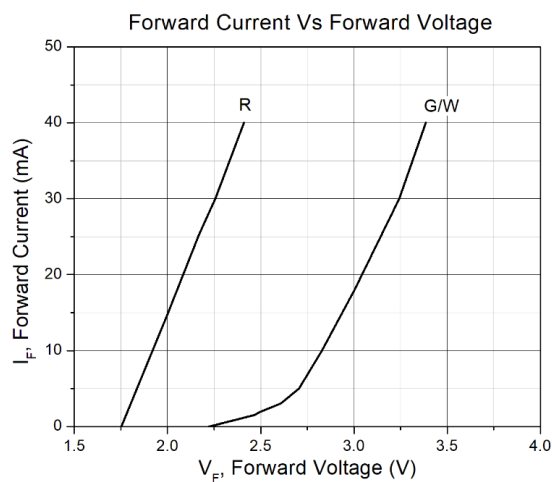


Figure 1

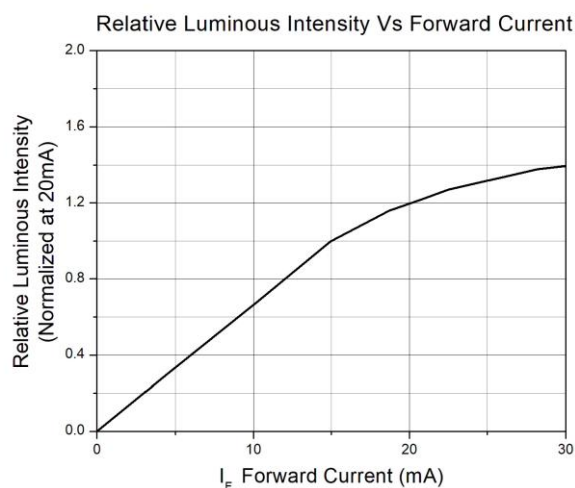


Figure 2

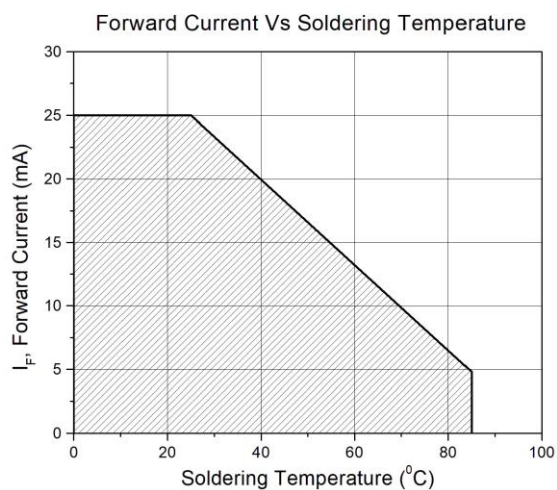


Figure 3

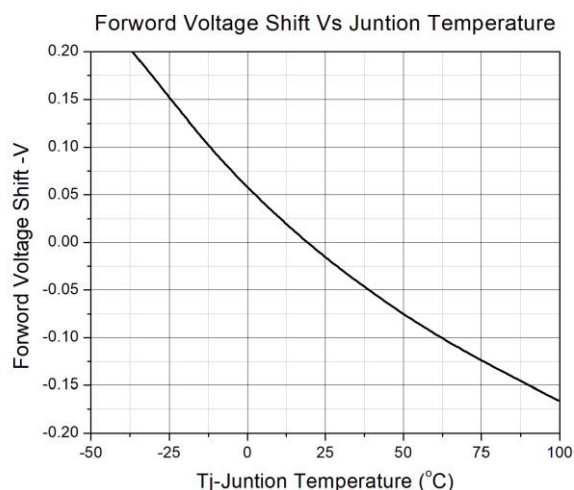


Figure 4

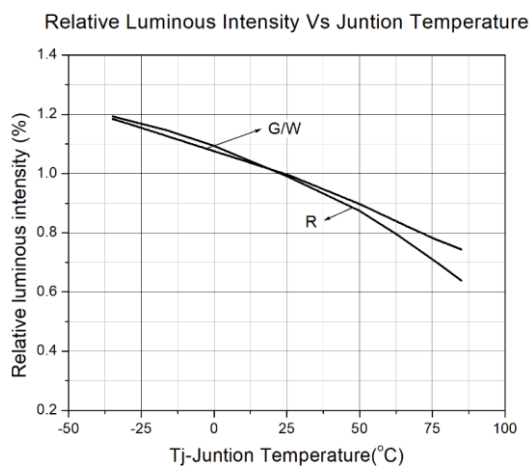


Figure 5


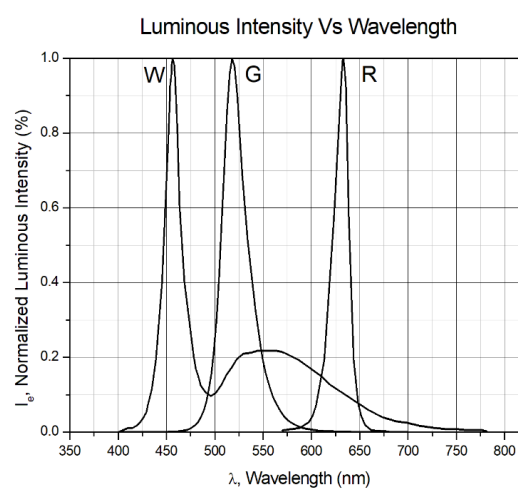


Figure 6



**Typical Characteristic Curves**




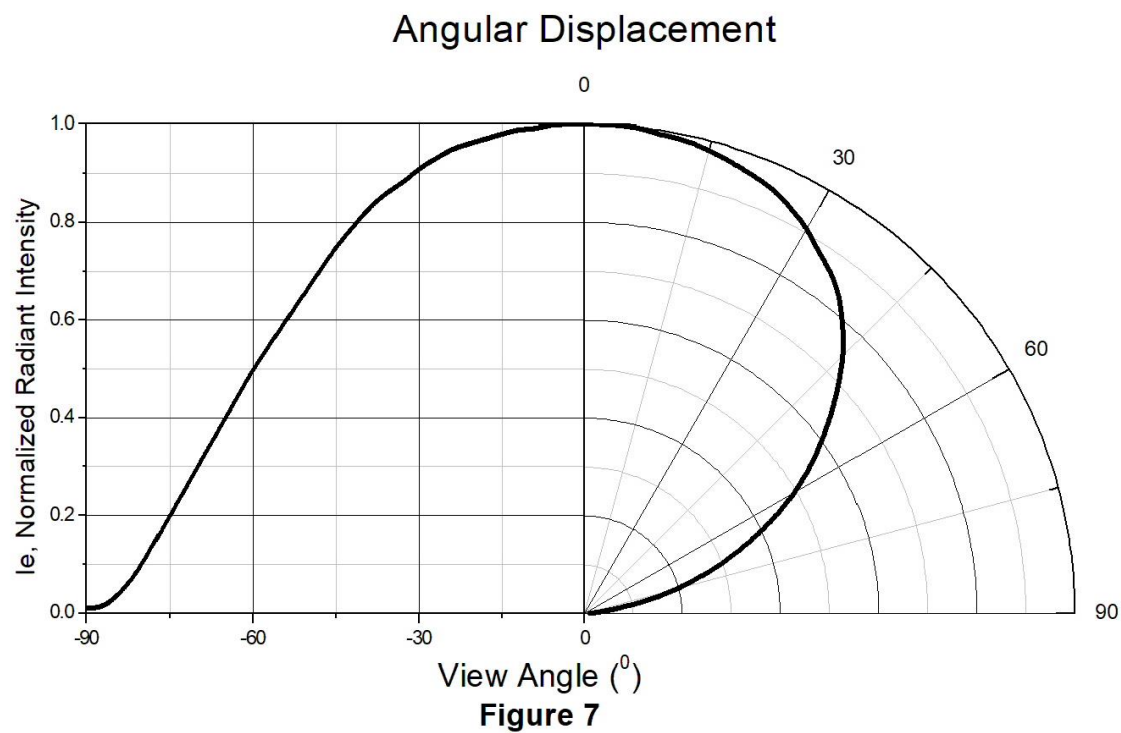

# RGWP161504-PCTC2


## Multi-Wavelength SMD Type

### Package Dimension *All dimensions are in mm, unless otherwise stated*

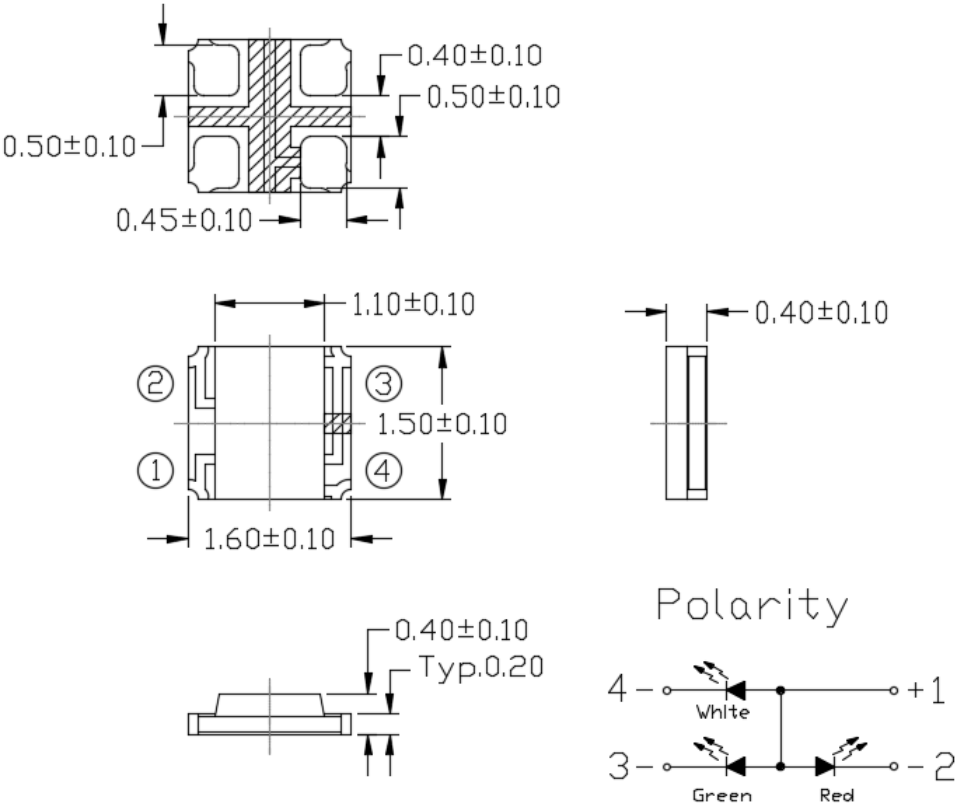

Note: Tolerance unless mentioned is ±0.1mm

### Recommended Soldering Mask *All dimensions are in mm, unless otherwise stated*



Note: Tolerance unless mentioned is ±0.1mm

### Ordering Information

| Part Number      | Description | Quantity |
|------------------|-------------|----------|
| RGWP161504-PCTC2 | Tape & Reel | 2000 pcs |






# RGWP161504-PCTC2

## Multi-Wavelength SMD Type


### Reel Dimension

All dimensions are in mm, unless otherwise stated

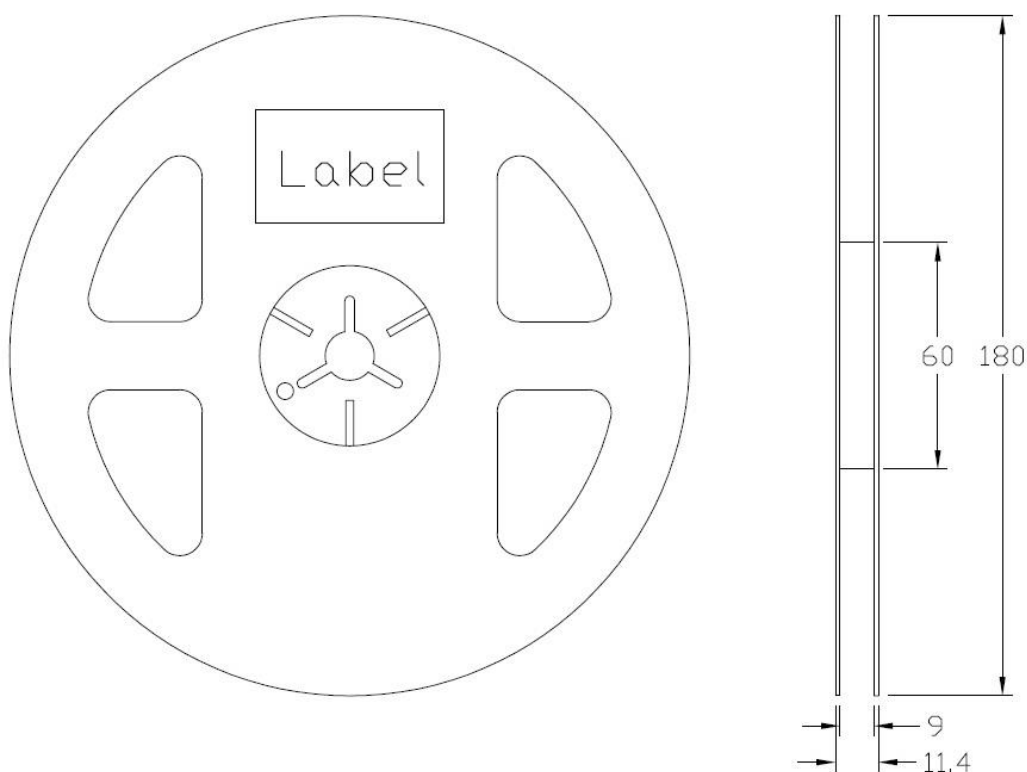

### Tape Dimension

All dimensions are in mm, unless otherwise stated

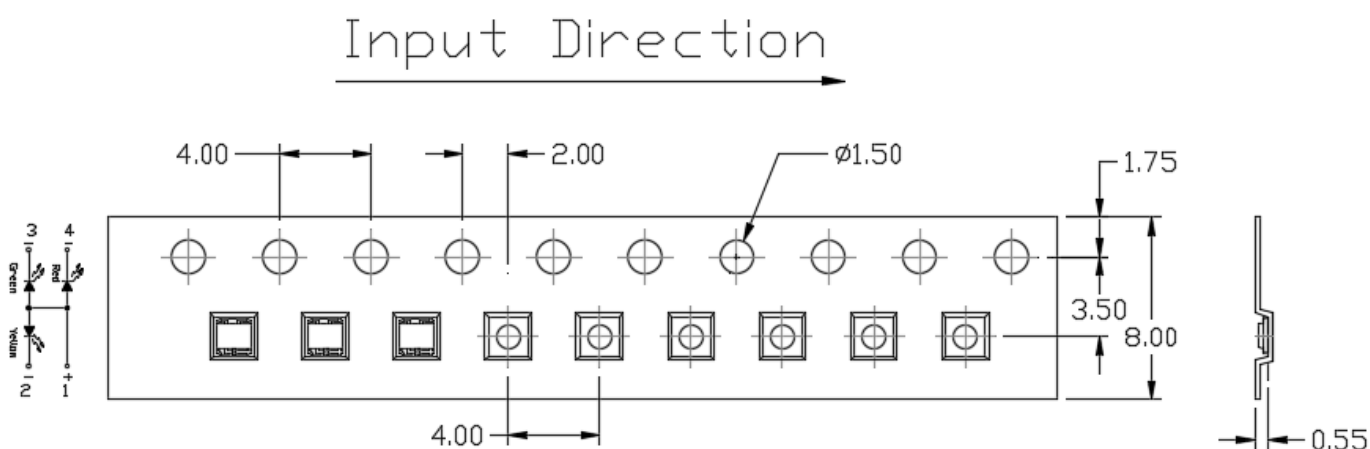

Note: Tolerance unless mentioned is  $\pm 0.1$ mm



## RGWP161504-PCTC2

### Multi-Wavelength SMD Type

#### Label Form Specification

CT Micro  
International Corporation

MSL-X  
MADE IN CHINA

CPN: XXXXXXXXXXXXXXXXXX  
|||||

Part no: XXXXXXXXXXXXXXXX  
|||||

Serial no: XXXXXXXX  
|||||

Lot no: XXXXXXXX  
|||||

Qty: XXXXXX Date Code: YWWJ  
|||||

IV: XX WD:XX VF:XX  
|||||

QR Code

Pb  
RoHS

CPN : Customer Part Number  
Part no: CTM Production Number  
Serial no: Production Number  
Lot no: Lot number  
Q'ty: Packing Quantity  
Date Code: Manufacture Date  
IV : Bin Code of Luminous Intensity  
WD : Bin Code of Dominant Wavelength  
VF : Bin Code of Forward Voltage  
MADE IN CHINA: Production Place

#### Storage Condition


1. Do not open moisture proof bag before the products are ready to use.
2. The moisture barrier bag should be stored at 30°C and 90%R.H. max. before opening.  
Shelf life of non-opened bag is 12 months after the bag sealing date.
3. After opening the moisture barrier bag floor life is 1 year at 30°C/60%RH. max. Unused LEDs should be resealed into moisture barrier bag. (Refer to J-STD-020 Standard)
4. If the moisture absorbent material has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the J-STD-033 Standard conditions.



# RGWP161504-PCTC2

## Multi-Wavelength SMD Type

### Reflow Profile

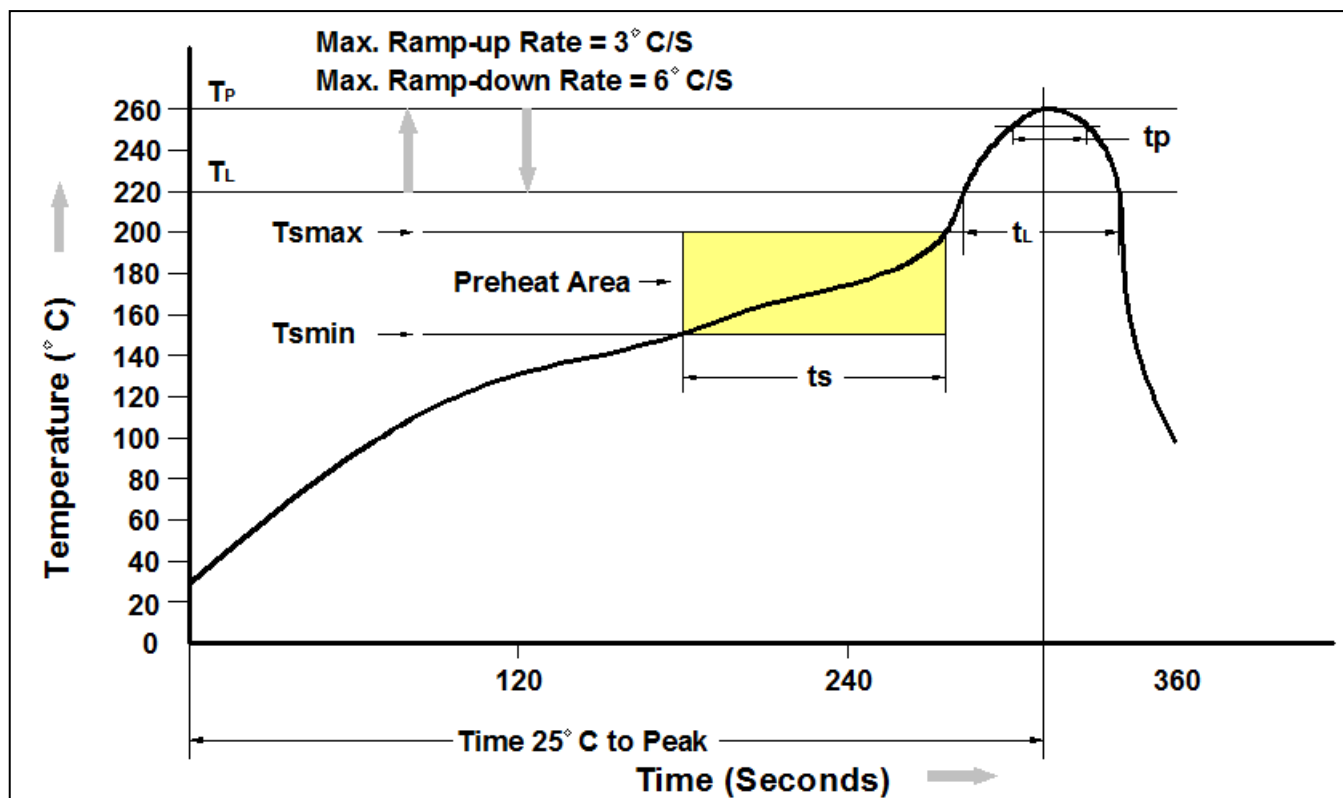

| Profile Feature                 | Pb-Free Assembly Profile |
|---------------------------------|--------------------------|
| Temperature Min. (Tsmin)        | 150°C                    |
| Temperature Max. (Tsmax)        | 200°C                    |
| Time (ts) from (Tsmin to Tsmax) | 60-120 seconds           |
| Ramp-up Rate (tL to tP)         | 3°C/second max.          |
| Liquidous Temperature (TL)      | 217°C                    |
| Time (tL) Maintained Above (TL) | 60 – 150 seconds         |
| Peak Body Package Temperature   | 260°C +0°C / -5°C        |
| Time (tP) within 5°C of 260°C   | 30 seconds               |
| Ramp-down Rate (TP to TL)       | 6°C/second max           |
| Time 25°C to Peak Temperature   | 8 minutes max.           |



## RGWP161504-PCTC2

### Multi-Wavelength SMD Type

---

#### DISCLAIMER

CT MICRO RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. CT MICRO DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

---

CT MICRO ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT EXPRESS WRITTEN APPROVAL OF CT MICRO INTERNATIONAL CORPORATION.

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instruction for use provided in the labelling, can be reasonably expected to result in significant injury to the user.*
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.*