



RGBP161507-PATC2

Multi-Wavelength SMD Type

Features

- Top view 1615 package
- Wide viewing angle
- RGB individual control
- High reliability
- RoHS compliance



Description

The RGBP161507-PATC2 is a high brightness device designed for demanding applications in efficiency and reduced space. An ideal device in emphasizing visual effects, advertisement, decoration as well as general backlighting needs.


Applications

- General lighting
- Indoor signage display applications
- Switch light
- Decorative and Entertainment lighting

Package Outline

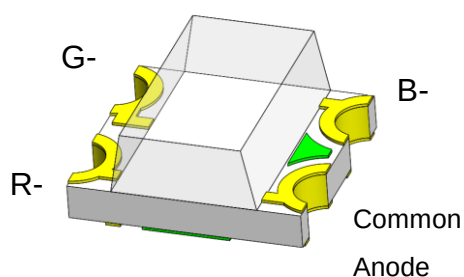

Schematic





RGBP161507-PATC2

Multi-Wavelength SMD Type

Absolute Maximum Rating at 25°C

Symbol	Parameters		Ratings	Units	Notes
I _F	Continuous Forward Current	R	25	mA	
		G	25		
		B	25		
I _{FP}	Peak Forward Current	R	60	mA	1
		G	60		
		B	60		
V _R	Reverse Voltage		5	V	
T _{opr}	Operating Temperature		-40 ~ +85	°C	
T _{stg}	Storage Temperature		-40 ~ +100	°C	
T _{sol}	Soldering Temperature		260	°C	2
P _D	Power Dissipation at(or below) 25°C Free Air Temperature	R	60	mW	
		G	95		
		B	95		

Electro-Optical Characteristics *T_A = 25°C (unless otherwise specified)*

Optical Characteristics (Red)

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
I _v	Luminous Intensity	I _F =20mA	112	-	285	mcd	3
λ _d	Dominant Wavelength	I _F =20mA	-	620	-	nm	
θ _{1/2}	Angle of Half Intensity	I _F =20mA	-	±65	-	deg	

Electrical Characteristics (Red)

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
V _F	Forward Voltage	I _F =20mA	1.7	-	2.4	V	
I _R	Reverse Current	V _R =5V	-	-	1	μA	



RGBP161507-PATC2

Multi-Wavelength SMD Type

Optical Characteristics (Green)

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
I _v	Luminous Intensity	I _F =20mA	565	-	1420	mcd	3
λ _d	Dominant Wavelength	I _F =20mA	510	-	525	nm	4
θ _{1/2}	Angle of Half Intensity	I _F =20mA	-	±65	-	deg	

Electrical Characteristics (Green)

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
V _F	Forward Voltage	I _F =20mA	2.7	-	3.3	V	
I _R	Reverse Current	V _R =5V	-	-	1	μA	

Optical Characteristics (Blue)

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
I _v	Luminous Intensity	I _F =20mA	112	-	285	mcd	3
λ _d	Dominant Wavelength	I _F =20mA	465	-	475	nm	4
θ _{1/2}	Angle of Half Intensity	I _F =20mA	-	±65	-	deg	

Electrical Characteristics (Blue)

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
V _F	Forward Voltage	I _F =20mA	2.7	-	3.3	V	
I _R	Reverse Current	V _R =5V	-	-	1	μA	

Notes:

1. I_{FP} Conditions--Pulse Width ≤ 100μs and Duty ≤ 10%.
2. Soldering time ≤ 10 seconds.



RGBP161507-PATC2

Multi-Wavelength SMD Type

3. Bin Range of Luminous Intensity

Red				
Bin Code	Min	Max	Unit	Condition
R	112	180	mcd	I _F =20mA
S	180	285		
Green				
Bin Code	Min	Max	Unit	Condition
UA	565	900	mcd	I _F =20mA
VA	900	1420		
Blue				
Bin Code	Min	Max	Unit	Condition
R	112	180	mcd	I _F =20mA
S	180	285		

Tolerance of Luminous Intensity $\pm 10\%$

4. Bin Range of Dominant Wavelength

Green				
Bin Code	Min	Max	Unit	Condition
A3	510	515	nm	I _F =20mA
A4	515	520		
A5	520	525		
Blue				
Bin Code	Min	Max	Unit	Condition
A6	465	470	nm	I _F =20mA
A7	470	475		

Tolerance of Dominant Wavelength: $\pm 1\text{nm}$.



RGBP161507-PATC2

Multi-Wavelength SMD Type

Typical Characteristic Curves

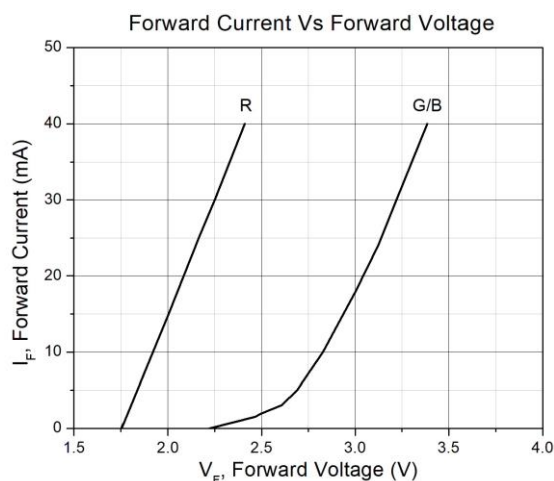


Figure 1

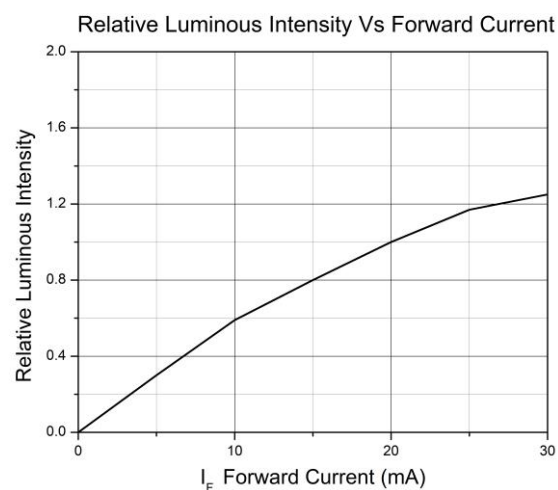


Figure 2

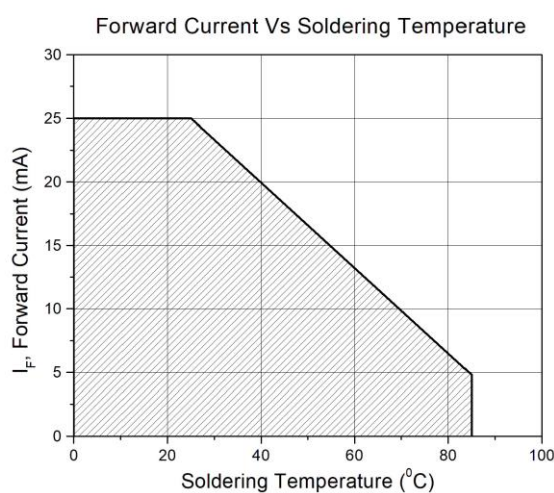


Figure 3

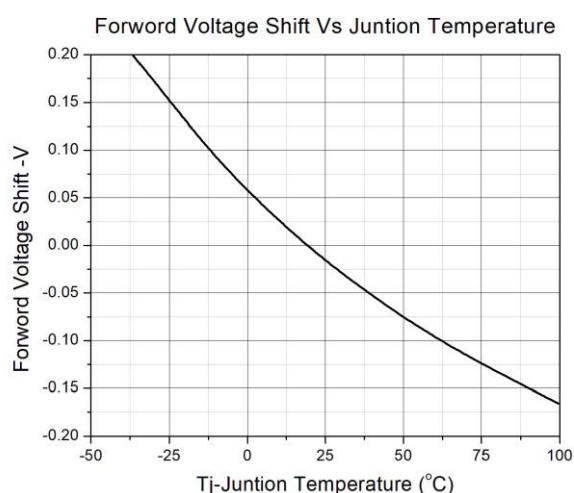


Figure 4

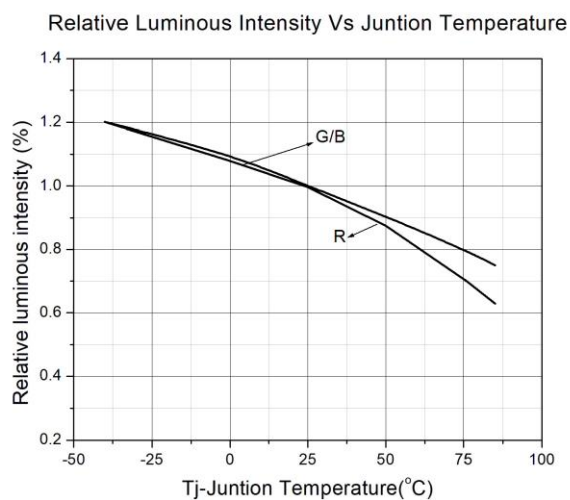


Figure 5


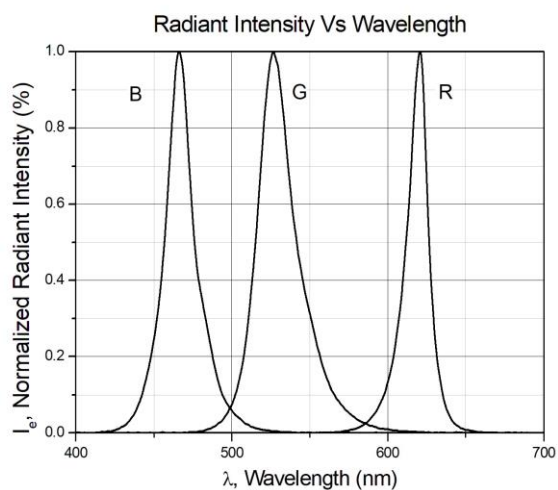


Figure 6



Typical Characteristic Curves



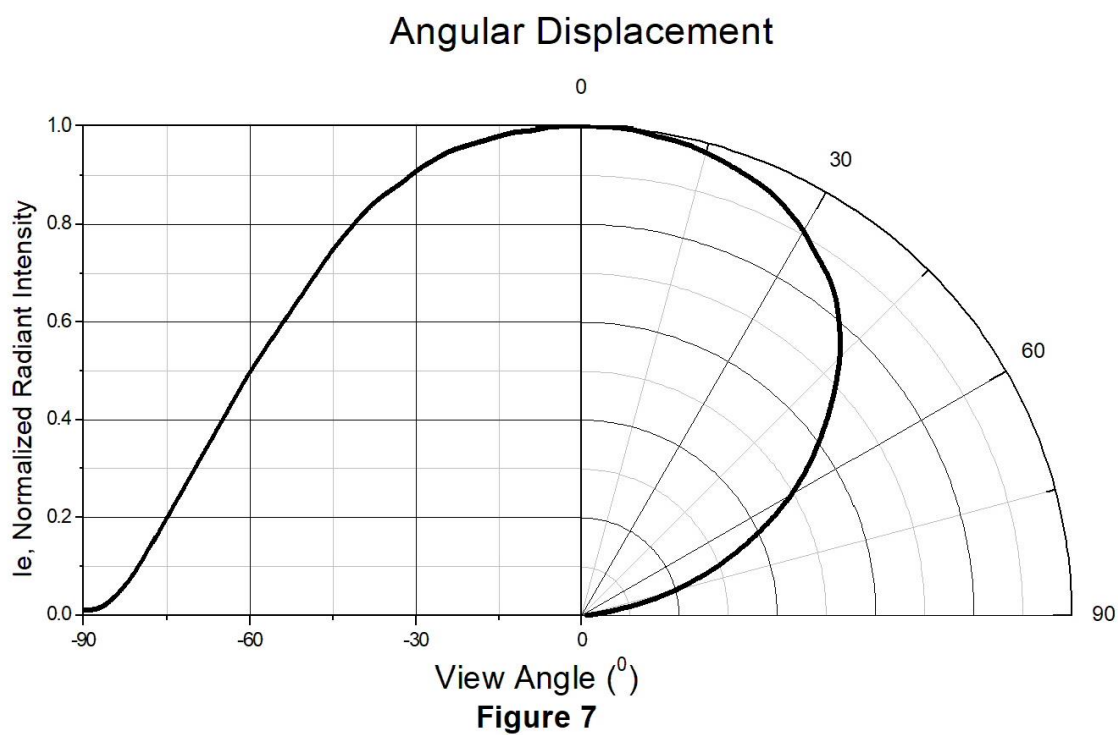


RGBP161507-PATC2

Multi-Wavelength SMD Type

Package Dimension


All dimensions are in mm, unless otherwise stated

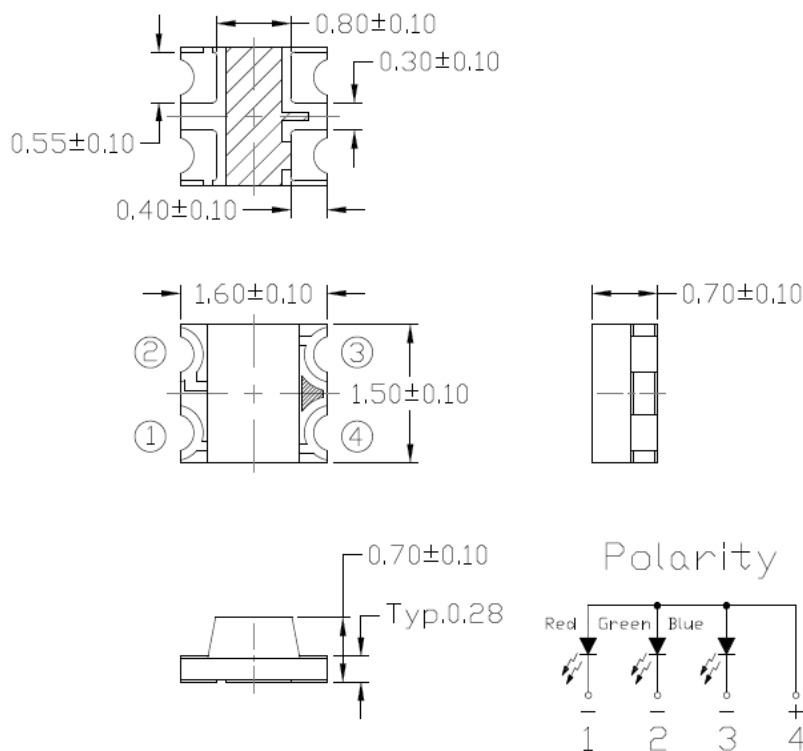

Note: Tolerance unless mentioned is ±0.1mm

Recommended Soldering Mask

All dimensions are in mm, unless otherwise stated

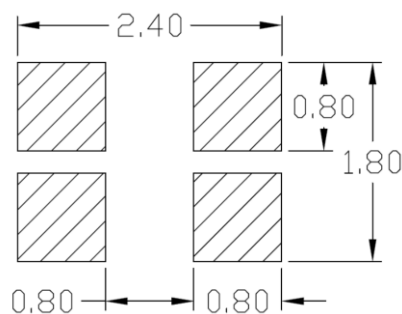

Note: Tolerance unless mentioned is ±0.1mm

Ordering Information

Part Number	Description	Quantity
RGBP161507-PATC2	Tape & Reel	2000 pcs




RGBP161507-PATC2

Multi-Wavelength SMD Type


Reel Dimension

All dimensions are in mm, unless otherwise stated

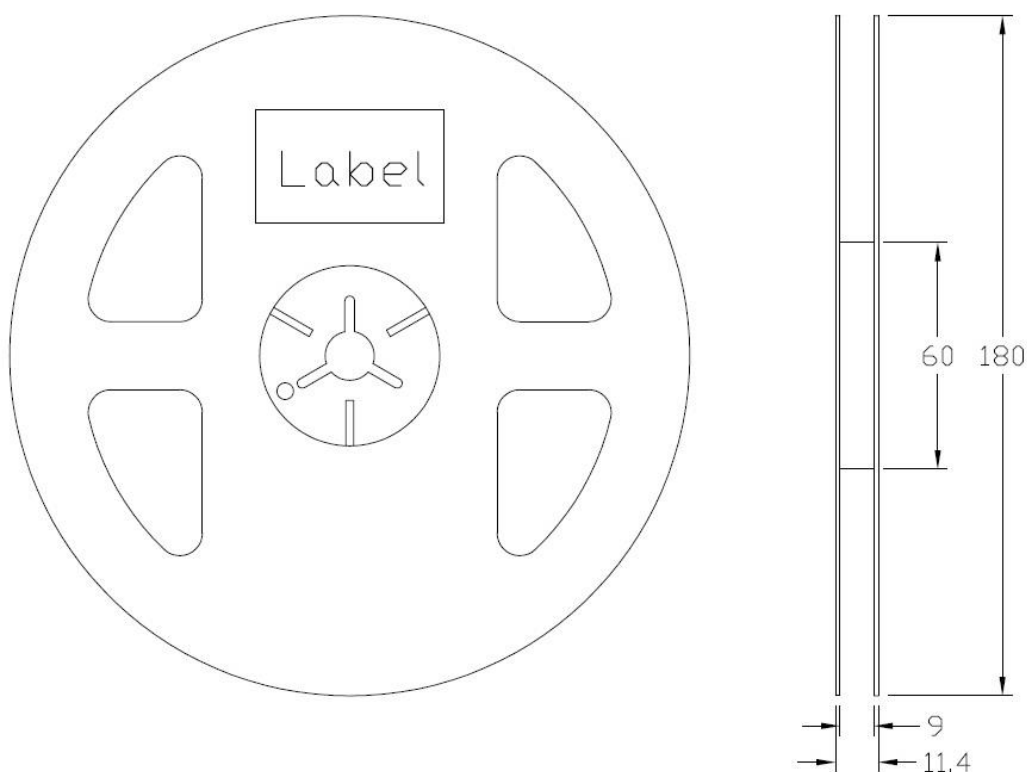

Tape Dimension

All dimensions are in mm, unless otherwise stated

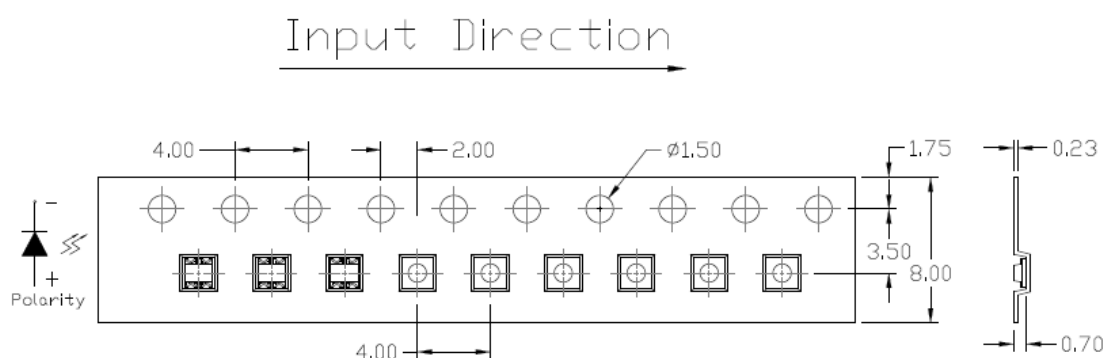

Note: Tolerance unless mentioned is $\pm 0.1\text{mm}$



RGBP161507-PATC2

Multi-Wavelength SMD Type

Label Form Specification

CT Micro
International Corporation

MSL-X
MADE IN CHINA

CPN: XXXXXXXXXXXXXXXXXX
|||||

Part no: XXXXXXXXXXXXXXXX
|||||

Serial no: XXXXXXXX
|||||

Lot no: XXXXXXXX
|||||

Qty: XXXXXX Date Code: YWWJ
||||| |||||

IV: XX WD:XX VF:XX
||||| ||||| |||||

QR Code

Pb
RoHS

CPN : Customer Part Number
Part no: CTM Production Number
Serial no: Production Number
Lot no: Lot number
Q'ty: Packing Quantity
Date Code: Manufacture Date
IV : Bin Code of Luminous Intensity
WD : Bin Code of Dominant Wavelength
VF : Bin Code of Forward Voltage
MADE IN CHINA: Production Place

Storage Condition


1. Do not open moisture proof bag before the products are ready to use.
2. The moisture barrier bag should be stored at 30°C and 90%R.H. max. before opening.
Shelf life of non-opened bag is 12 months after the bag sealing date.
3. After opening the moisture barrier bag floor life is 1 year at 30°C/60%RH. max. Unused LEDs should be resealed into moisture barrier bag. (Refer to J-STD-020 Standard)
4. If the moisture absorbent material has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the J-STD-033 Standard conditions.



RGBP161507-PATC2

Multi-Wavelength SMD Type

Reflow Profile

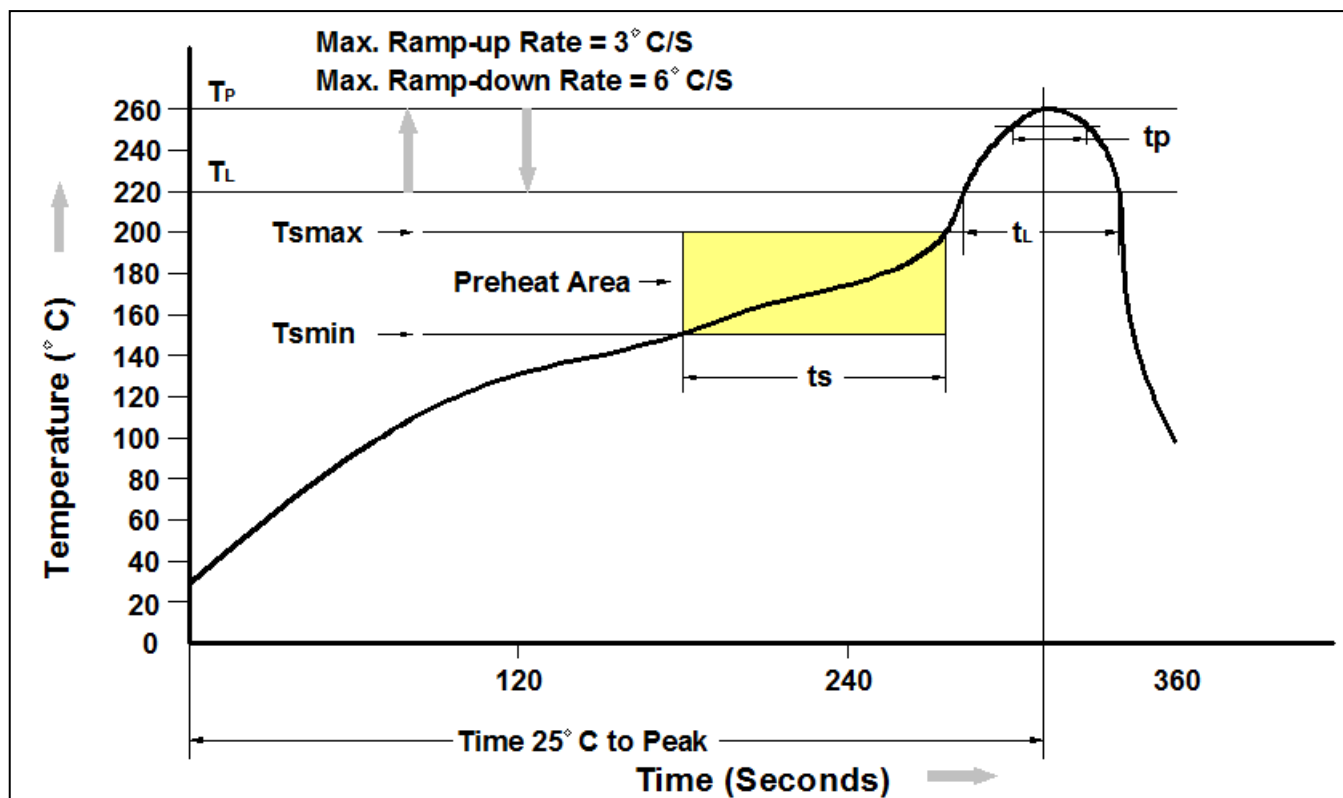

Profile Feature	Pb-Free Assembly Profile
Temperature Min. (T _{smin})	150°C
Temperature Max. (T _{smax})	200°C
Time (t _s) from (T _{smin} to T _{smax})	60-120 seconds
Ramp-up Rate (t _L to t _P)	3°C/second max.
Liquidous Temperature (T _L)	217°C
Time (t _L) Maintained Above (T _L)	60 – 150 seconds
Peak Body Package Temperature	260°C +0°C / -5°C
Time (t _P) within 5°C of 260°C	30 seconds
Ramp-down Rate (T _P to T _L)	6°C/second max
Time 25°C to Peak Temperature	8 minutes max.



RGBP161507-PATC2

Multi-Wavelength SMD Type

DISCLAIMER

CT MICRO RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. CT MICRO DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

CT MICRO ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT EXPRESS WRITTEN APPROVAL OF CT MICRO INTERNATIONAL CORPORATION.

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instruction for use provided in the labelling, can be reasonably expected to result in significant injury to the user.*
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.*