



# WP160806-DTC4

## SMD Type White Emitter

### Features

- Top view 0603 package
- Viewing Angle =  $\pm 65^\circ$
- Compatible with infrared and vapor phase reflow solder process
- High reliability
- Ultra bright White
- RoHS compliance

### Applications

- Optical indicator.
- Switch and Symbol Display.


### Description

The WP160806-DTC4 is an AlInGaN White LED housed in a miniature SMD package.


Static electricity and surge damage the LEDs.

It is recommended to use a wrist band or anti-electrostatic glove when handling the LEDs.

### Package Outline

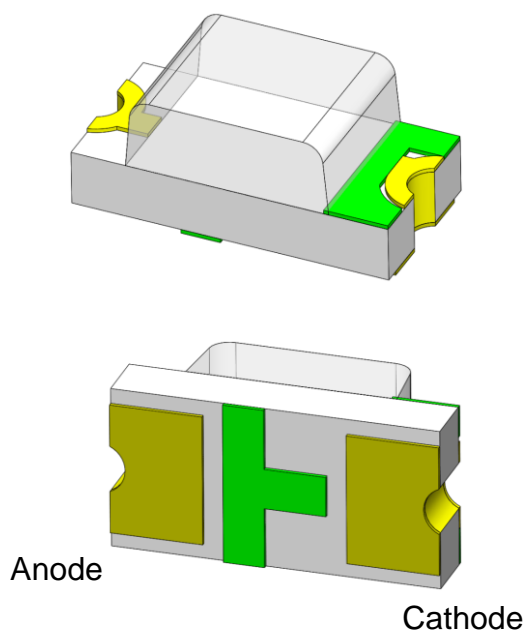

### Schematic

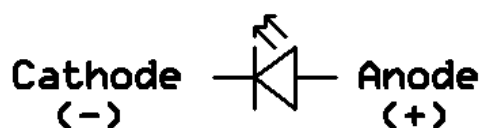





# WP160806-DTC4

## SMD Type White Emitter

### Absolute Maximum Rating at 25°C

Symbol	Parameters	Ratings	Units	Notes
I <sub>F</sub>	Continuous Forward Current	25	mA	
I <sub>FP</sub>	Peak Forward Current	60	mA	1
V <sub>R</sub>	Reverse Voltage	5	V	
T <sub>opr</sub>	Operating Temperature	-40 ~ +85	°C	
T <sub>stg</sub>	Storage Temperature	-40 ~ +100	°C	
T <sub>sol</sub>	Soldering Temperature	260	°C	2
P <sub>D</sub>	Power Dissipation at(or below) 25°C Free Air Temperature	95	mW	

### Electro-Optical Characteristics *TA = 25°C (unless otherwise specified)*

#### Optical Characteristics

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
I <sub>v</sub>	Luminous Intensity	I <sub>F</sub> =2mA	100	-	156	mcd	3
θ <sub>1/2</sub>	Angle of Half Intensity	I <sub>F</sub> =2mA	-	±65	-	deg	

#### Electrical Characteristics

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
V <sub>F</sub>	Forward Voltage	I <sub>F</sub> =2mA	2.5	-	3.0	V	4
I <sub>R</sub>	Reverse Current	V <sub>R</sub> =5V	-	-	1	μA	

#### Notes:

1. I<sub>FP</sub> Conditions--Pulse Width ≤ 100μs and Duty ≤ 10%.
2. Soldering time ≤ 10 seconds.
3. Bin Range of Luminous Intensity

Bin Code	Min	Max	Unit	Condition
n2	100	125	mcd	I <sub>F</sub> =2mA
o1	125	156		

Tolerance of Luminous Intensity ±10%





## WP160806-DTC4

### SMD Type White Emitter

#### 4. Bin Range of Forward Voltage

Bin Code	Min	Max	Unit	Condition
32	2.5	2.6	V	$I_F=2mA$
33	2.6	2.7		
34	2.7	2.8		
35	2.8	2.9		
36	2.9	3.0		

Tolerance of Forward Voltage  $\pm 0.05V$ .

#### 5. Bin Range of Chromaticity Coordinates

Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y
A8	0.2563	0.2600	A9	0.2596	0.2660
	0.2596	0.2660		0.2629	0.2720
	0.2696	0.2660		0.2729	0.2720
	0.2663	0.2600		0.2696	0.2660
A10	0.2629	0.2720	A11	0.2662	0.2780
	0.2662	0.2780		0.2695	0.2840
	0.2762	0.2780		0.2795	0.2840
	0.2729	0.2720		0.2762	0.2780
A12	0.2695	0.2840	A13	0.2728	0.2900
	0.2728	0.2900		0.2761	0.2960
	0.2828	0.2900		0.2861	0.2960
	0.2795	0.2840		0.2828	0.2900

1. The value is based on driving current by 2mA

2. Tolerance of Chromaticity Coordinates  $\pm 0.01$






# WP160806-DTC4

## SMD Type White Emitter

### The C.I.E. 1931 Chromaticity Diagram

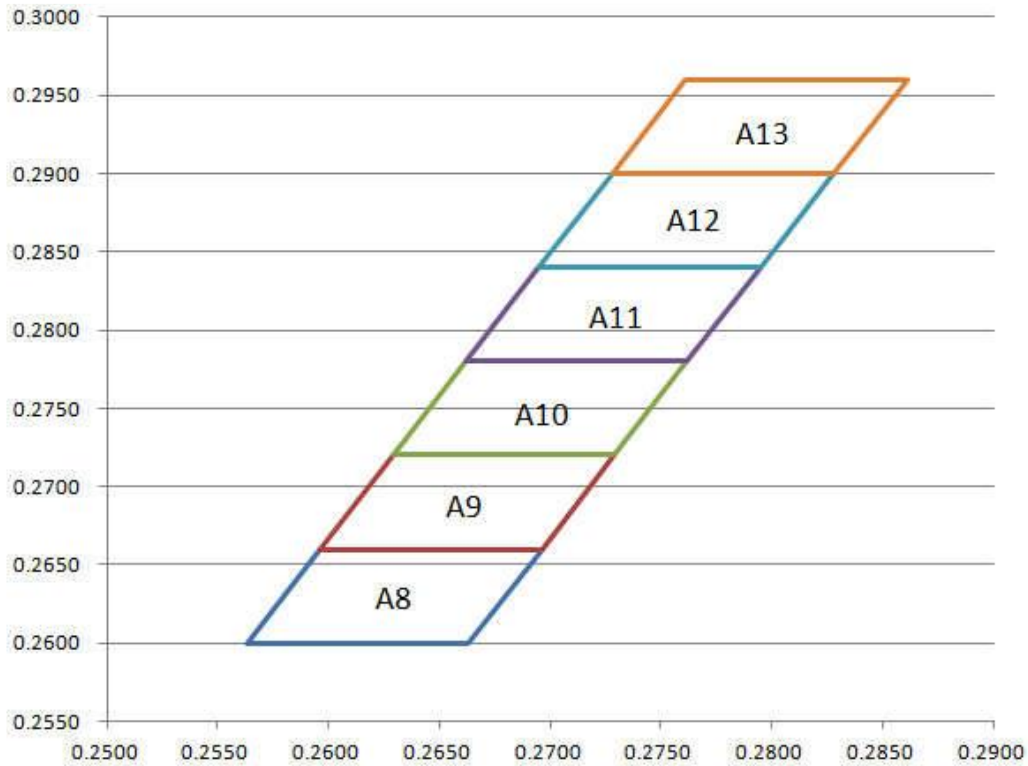





# WP160806-DTC4

## SMD Type White Emitter

### Typical Characteristic Curves

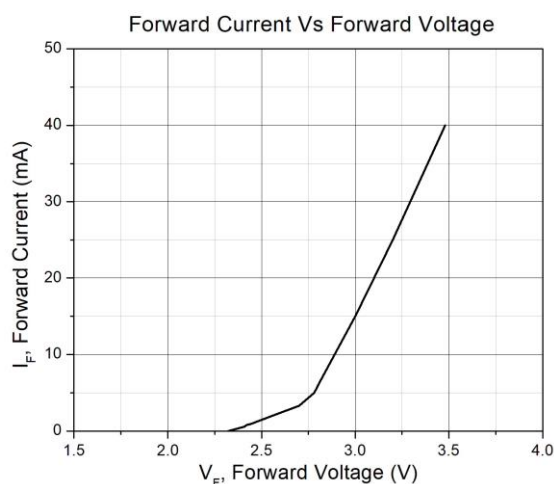


Figure 1

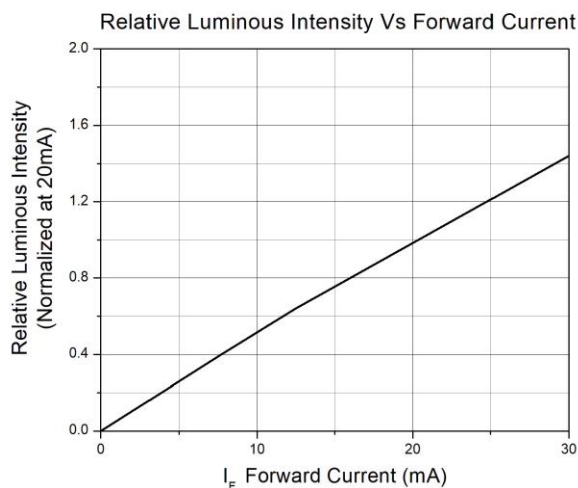


Figure 2

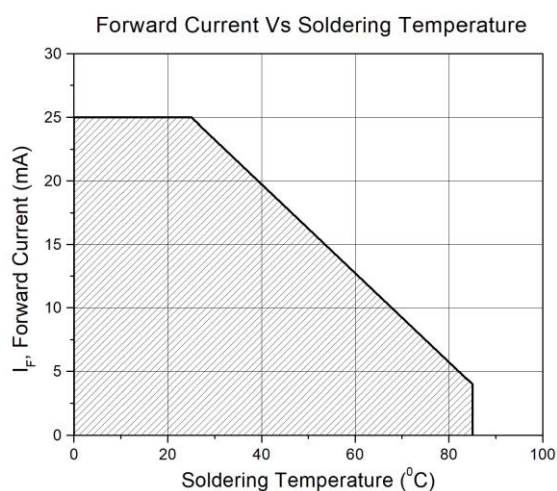


Figure 3

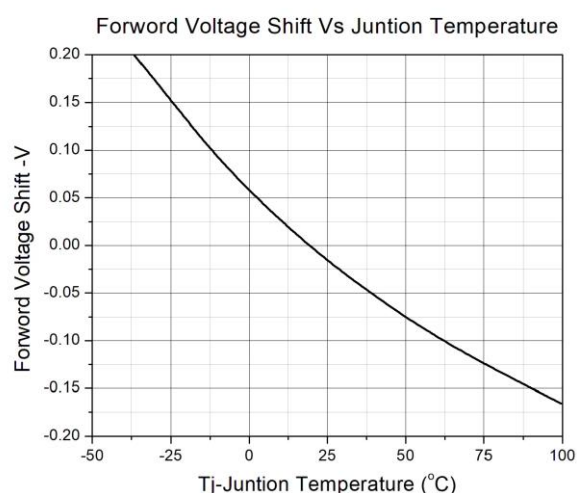


Figure 4

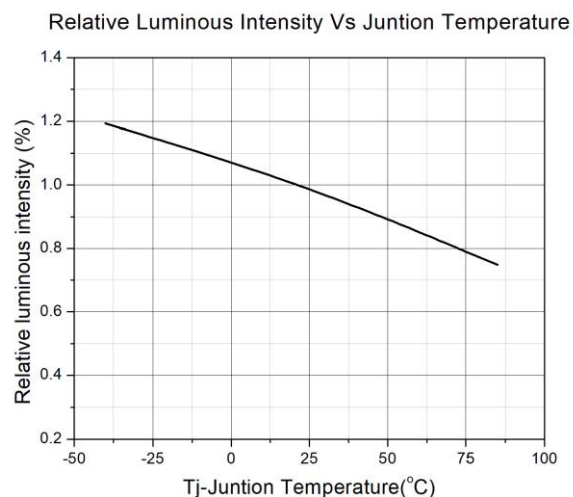


Figure 5

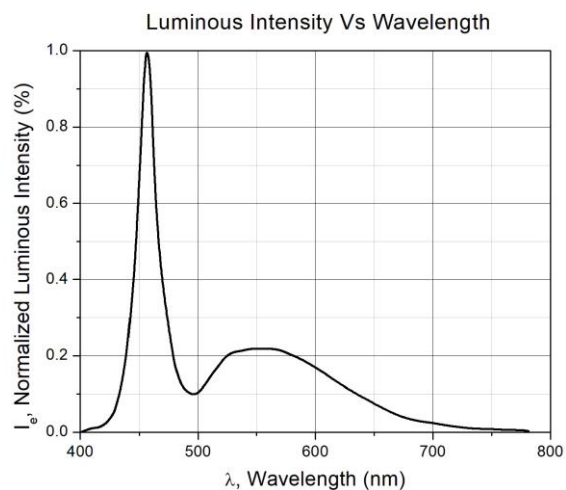


Figure 6





# WP160806-DTC4

## SMD Type White Emitter

### Typical Characteristic Curves

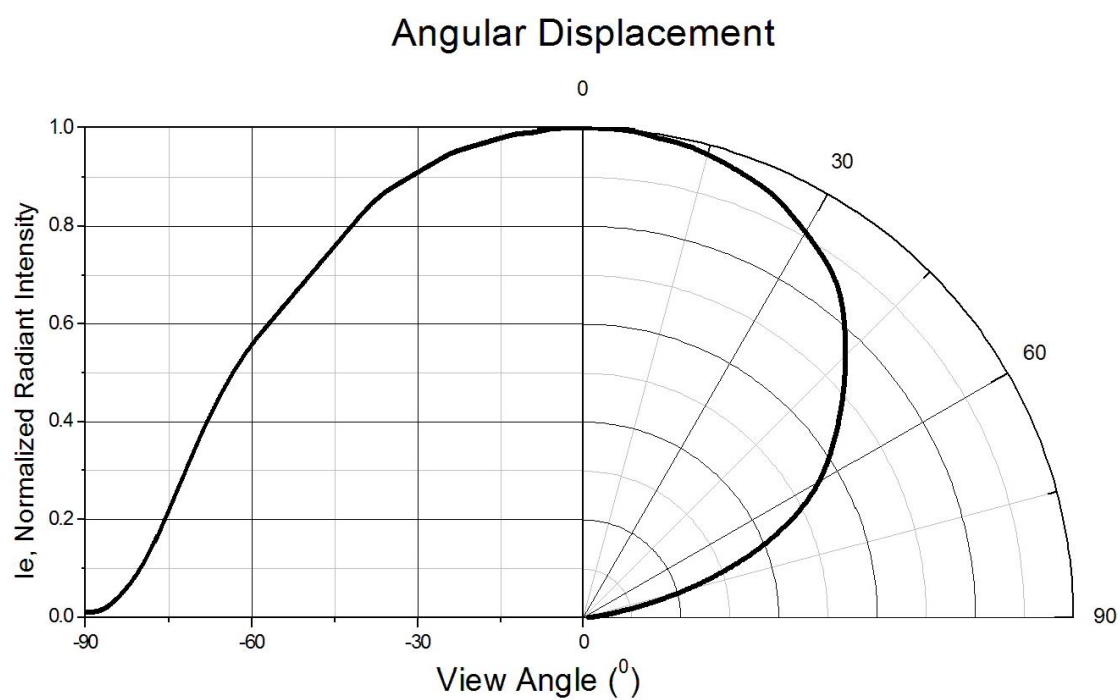


Figure 7






# WP160806-DTC4


## SMD Type White Emitter

### Package Dimension *All dimensions are in mm, unless otherwise stated*

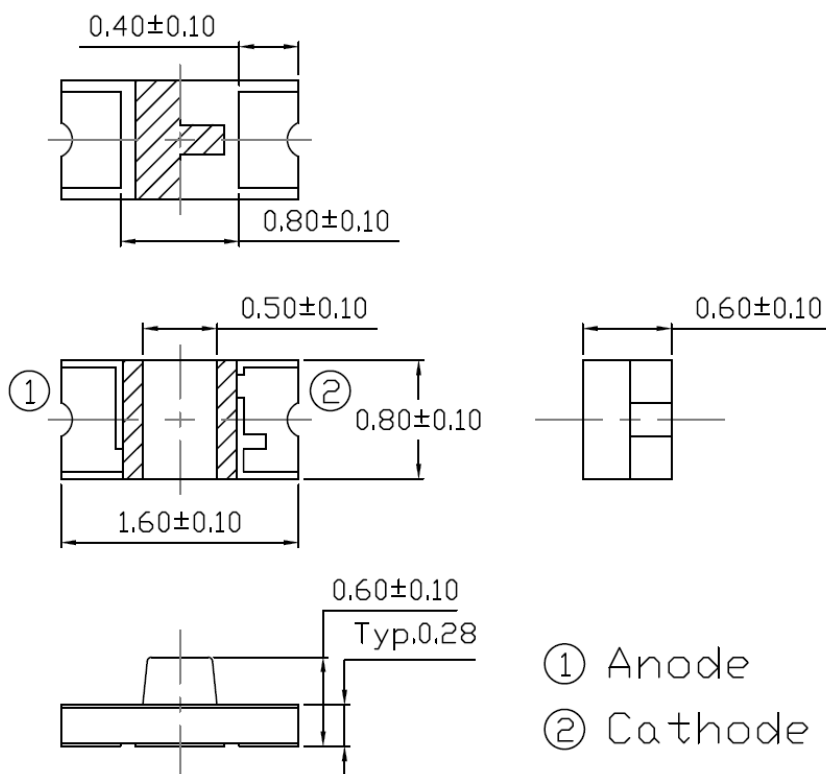

Note: Tolerance unless mentioned is  $\pm 0.1$ mm.

### Recommended Soldering Mask *All dimensions are in mm, unless otherwise stated*

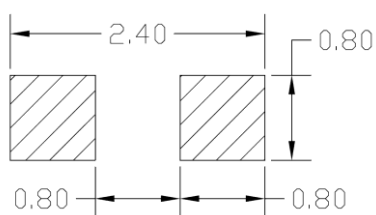

Note: Tolerance unless mentioned is  $\pm 0.1$ mm.

### Ordering Information

Part Number	Description	Quantity
WP160806-DTC4	Tape & Reel	4000 pcs







# WP160806-DTC4

## SMD Type White Emitter

**Reel Dimension** *All dimensions are in mm, unless otherwise stated*

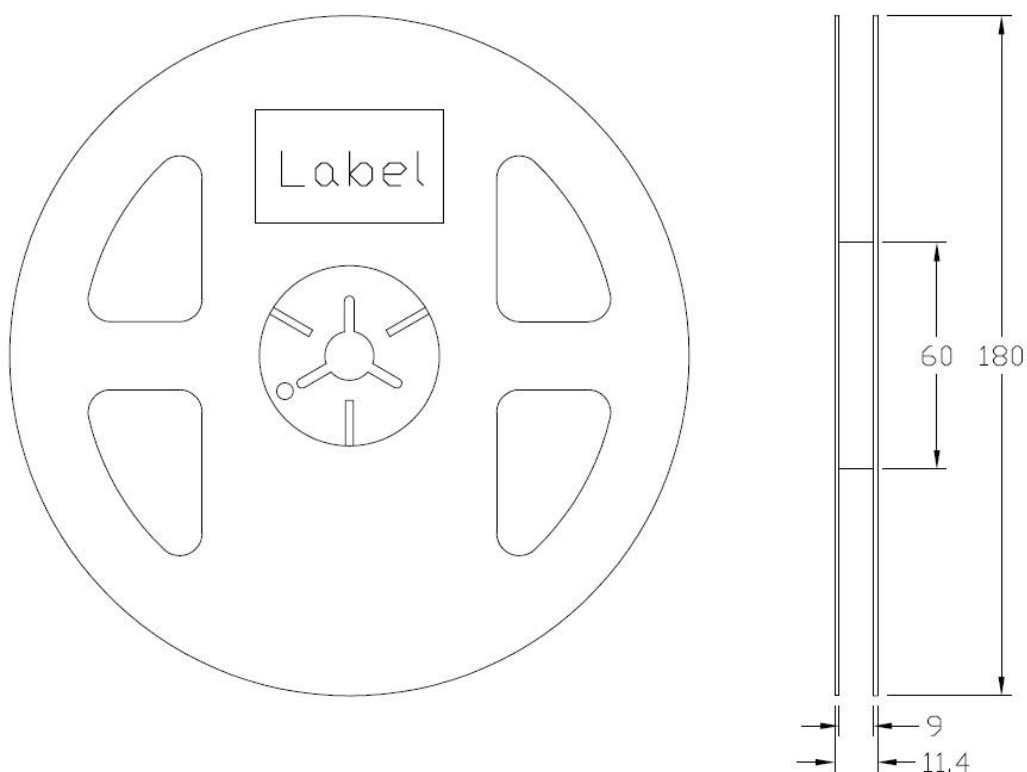

**Tape Dimension** *All dimensions are in mm, unless otherwise stated*

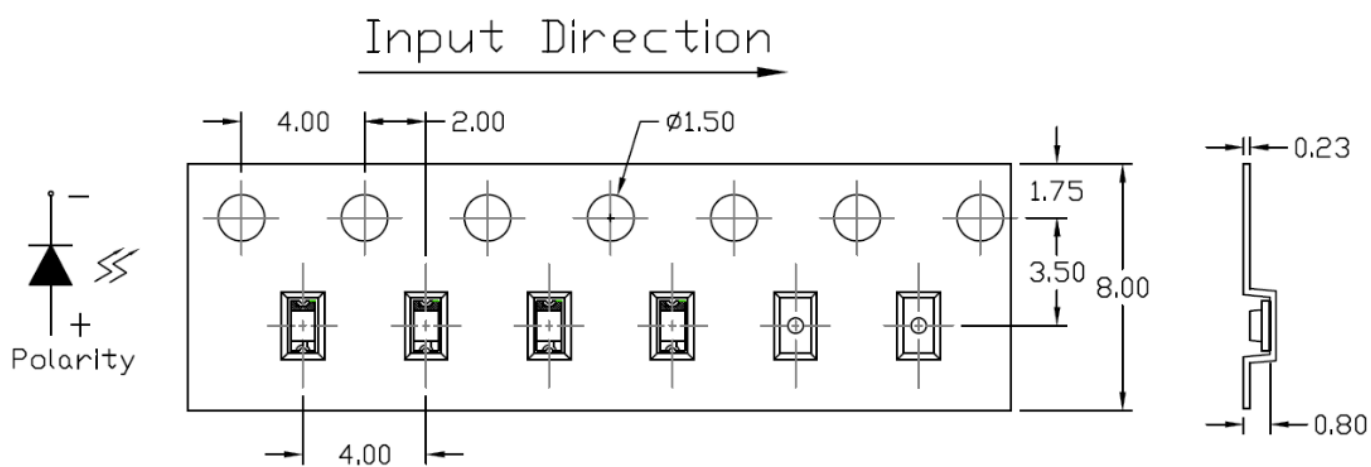

Note: Tolerance unless mentioned is  $\pm 0.1$  mm.





## Label Form Specification

CT Micro  
International Corporation

MSL-X  
MADE IN CHINA

CPN: XXXXXXXXXXXXXXXXX  
|||||

Part no: XXXXXXXXXXXXXXXX  
|||||

Serial no: XXXXXXXX  
|||||

Lot no: XXXXXXXX  
|||||

Qty: XXXXXX      Date Code: YWWJ  
|||||      |||||

IV: XX      WD:XX      VF:XX  
|||||      |||||      |||||

QR Code

Pb  
RoHS

CPN : Customer Part Number

Part no: CTM Production Number

Serial no: Production Number

Lot no: Lot number

Q'ty: Packing Quantity

Date Code: Manufacture Date

IV : Bin Code of Luminous Intensity

WD : Bin Code of Dominant Wavelength

VF : Bin Code of Forward Voltage

MADE IN CHINA: Production Place

## Storage Condition

1. Do not open moisture proof bag before the products are ready to use.
2. The moisture barrier bag should be stored at 30°C and 90%R.H. max. before opening.  
Shelf life of non-opened bag is 12 months after the bag sealing date.
3. After opening the moisture barrier bag floor life is 1 year at 30°C/60%RH. max. Unused LEDs should be resealed into moisture barrier bag. (Refer to J-STD-020 Standard)
4. If the moisture absorbent material has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the J-STD-033 Standard conditions.






# WP160806-DTC4

## SMD Type White Emitter

### Reflow Profile

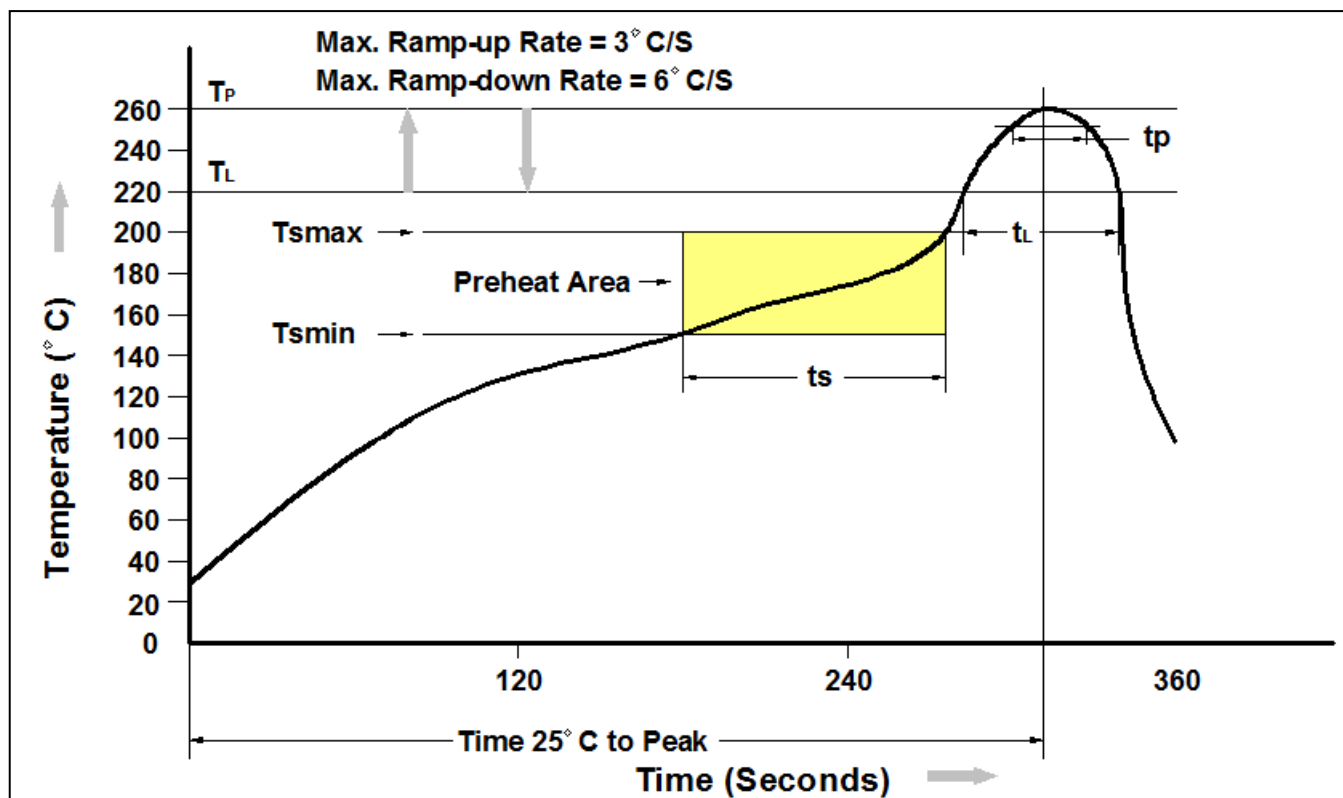

Profile Feature	Pb-Free Assembly Profile
Temperature Min. ( $T_{smin}$ )	150°C
Temperature Max. ( $T_{smax}$ )	200°C
Time ( $t_s$ ) from ( $T_{smin}$ to $T_{smax}$ )	60-120 seconds
Ramp-up Rate ( $t_L$ to $t_P$ )	3°C/second max.
Liquidous Temperature ( $T_L$ )	217°C
Time ( $t_L$ ) Maintained Above ( $T_L$ )	60 – 150 seconds
Peak Body Package Temperature	260°C +0°C / -5°C
Time ( $t_P$ ) within 5°C of 260°C	30 seconds
Ramp-down Rate ( $T_P$ to $T_L$ )	6°C/second max
Time 25°C to Peak Temperature	8 minutes max.





## WP160806-DTC4

### SMD Type White Emitter

---

#### DISCLAIMER

CT MICRO RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. CT MICRO DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

---

CT MICRO ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT EXPRESS WRITTEN APPROVAL OF CT MICRO INTERNATIONAL CORPORATION.

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instruction for use provided in the labelling, can be reasonably expected to result in significant injury to the user.*
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.*